

CONTACTS

PINS & SOCKETS




SIZE	WIRE SIZE (AWG)	CONTACTS		WIRE STRIP LENGTHS	WIRE RANGE MAX.
		PIN	SOCKET		
22	22, 24, 26, 28	LMD-4022-36LJ	LMD-4122-96LD	.156 - .125 (3.96 - 3.18)	0.054 (1.37)
20	20, 22, 24	LMD-4020-96LD LMD-4020-10(*)	LMD-4120-96LD LMD-4120-10(*)	.185 - .155 (4.70 - 3.94)	0.083 (2.11)
16	16, 18, 20	LMD-4016-96LD LMD-4016-10(*)	LMD-4116-96LD LMD-4116-10(*)	.260 - .230 (6.60 - 5.84)	0.103 (2.61)
8	10, 8	LMD-4008-36L	LMD-4108-36L	.395 - .365 (10.03 - 9.27)	0.255 (6.48)

(\*) = Thermocouple Plating  
 P = Chromel  
 R = Alumel  
 N = Constantan  
 C = Copper

CONTACT TOOLS

PINS & SOCKETS

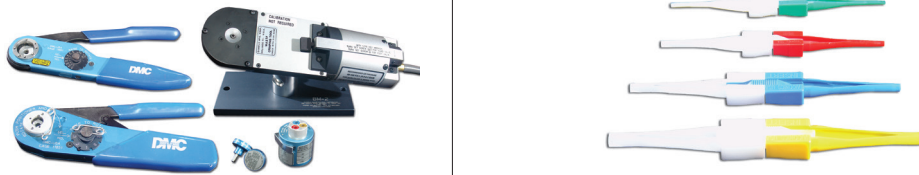

SIZE	WIRE SIZE (AWG)	CRIMP TOOL	POSITIONER/LOCATOR		INSERTION/ EXTRACTION	INSERTION TIP COLOR	EXTRACTION TIP COLOR
			PIN	SOCKET			
22	22, 24, 26, 28	M22520/2-01	K703	M22520/2-07	M81969/14-01	Green	White
20	20, 22, 24	M22520/1-01	M22520/1-02		M81969/14-02	Red	White
16	16, 18, 20				M81969/14-03	Blue	White
8	10, 8	TP-201393	TP-201408		M81969/14-06	-	Red

**Module Extraction Tool:**  
 TP-201397

