


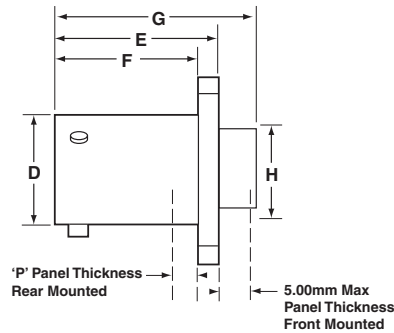



DIMENSIONS

RECEPTACLES

SJT00RT
JN1003BVIEW D ENLARGED
FOR COAXIAL USE ONLY

SHELL SIZE	L MAX. (+.000/-0.010)	M +.000/-0.005	R (TP) (+.040/-0.040)	S +.011/-0.010 (+.010/-0.010)	T +.005/-0.005 (PLATED UNEF)	V THREAD MODIFIED		N +.001/-0.005	P MAX.
						CLASS 2A MAJOR DIAMETER	MODIFIED (+.000/-0.010)		
8	.500 (12.7)	.632 (16.05)	.594 (15.09)	.812 (20.62)	.120 (3.05)	.4375-28	.412 - .417	.473 (12.61)	.117 (2.92)
10	.500 (12.7)	.632 (16.05)	.719 (18.26)	.938 (23.82)	.120 (3.05)	.5625-24	.542 - .538	.590 (14.99)	.117 (2.92)
12	.500 (12.7)	.632 (16.05)	.812 (20.62)	1.031 (26.19)	.120 (3.05)	.6875-24	.667 - .663	.750 (19.05)	.117 (2.92)
14	.500 (12.7)	.632 (16.05)	.906 (23.01)	1.125 (28.57)	.120 (3.05)	.8125-20	.791 - .787	.875 (22.22)	.117 (2.92)
16	.500 (12.7)	.632 (16.05)	.969 (24.61)	1.219 (30.96)	.120 (3.05)	.9375-20	.916 - .912	1.000 (25.40)	.117 (2.92)
18	.500 (12.7)	.632 (16.05)	1.062 (26.97)	1.312 (33.32)	.120 (3.05)	1.0625-18	1.034 - 1.030	1.125 (28.57)	.117 (2.92)
20	.500 (12.7)	.602 (15.29)	1.156 (29.36)	1.438 (36.52)	.120 (3.05)	1.1875-18	1.158 - 1.154	1.250 (31.75)	.087 (2.21)
22	.500 (12.7)	.602 (15.29)	1.250 (31.75)	1.562 (39.67)	.120 (3.05)	1.3125-18	1.283 - 1.279	1.375 (34.92)	.087 (2.21)
24	.550 (13.97)	.602 (15.29)	1.375 (34.92)	1.688 (42.87)	.147 (3.73)	1.4375-18	1.408 - 1.404	1.500 (38.10)	.055 (1.39)




SJT02RE
JN1003H

SHELL SIZE	F +.001/-0.005 (+.000/-0.010)	E +.006/-0.000 (+.150/-0.000)	G MAX.	H MAX.	B (TP)	A +.011/-0.010 (+.040/-0.040)	C +.005/-0.005 (+.010/-0.010)	D +.001/-0.005 (+.000/-0.130)	P MAX.
8	.632 (16.05)	.717 (18.21)	1.089 (27.65)	.469 (11.91)	.594 (15.09)	.812 (20.62)	.120 (3.05)	.473 (12.00)	.117 (3.00)
10	.632 (16.05)	.717 (18.21)	1.089 (27.65)	.594 (15.09)	.719 (18.26)	.938 (23.82)	.120 (3.05)	.590 (15.00)	.117 (3.00)
12	.632 (16.05)	.717 (18.21)	1.089 (27.65)	.719 (18.26)	.812 (20.62)	1.031 (26.19)	.120 (3.05)	.750 (19.05)	.117 (3.00)
14	.632 (16.05)	.717 (18.21)	1.089 (27.65)	.844 (21.44)	.906 (23.01)	1.125 (28.57)	.120 (3.05)	.875 (22.22)	.117 (3.00)
16	.632 (16.05)	.717 (18.21)	1.089 (27.65)	.969 (24.61)	.969 (24.61)	1.219 (30.96)	.120 (3.05)	1.000 (25.4)	.117 (3.00)
18	.632 (16.05)	.717 (18.21)	1.089 (27.65)	1.078 (27.38)	1.062 (26.97)	1.312 (33.32)	.120 (3.05)	1.125 (28.57)	.117 (3.00)
20	.602 (15.29)	.717 (18.21)	1.089 (27.65)	1.203 (30.56)	1.156 (29.36)	1.438 (36.52)	.120 (3.05)	1.250 (31.75)	.117 (3.00)
22	.602 (15.29)	.717 (18.21)	1.089 (27.65)	1.329 (33.73)	1.250 (31.75)	1.562 (39.67)	.120 (3.05)	1.375 (34.92)	.117 (3.00)
24	.602 (15.29)	.717 (18.21)	1.131 (28.72)	1.453 (36.91)	1.375 (34.92)	1.688 (42.87)	.147 (3.73)	1.500 (38.10)	.055 (2.26)

All dimensions in inches (millimeters in parenthesis)

RECEPTACLES



SJTP00RT

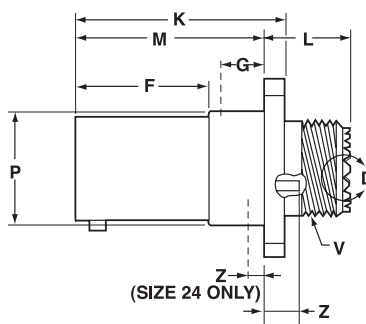

VIEW D ENLARGED
FOR COAXIAL USE ONLY

Shell Size	F +.000/- .005 (+.000/- .010)	K +.006/- .000 (+.150/- .000)	L Max.	M +.000/- .005 (+.000/- .010)	R (TP)	S +.011/- .010 (±.04/- .04)	T +.005/- .005 (+.01/- .01)	Z +.031/- .031 (+.07/- .07)	V Thread Class 2A (Plated UNEF)	P Diameter +.001/- .005 (+.00/- .01)	W Max.	G Max.
8	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	.594 (15.09)	.812 (20.62)	.120 (3.05)	.062 (1.58)	.4375-28	.516 (13.11)	.812 (20.62)	.345 (8.76)
10	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	.719 (18.26)	.938 (23.82)	.120 (3.05)	.062 (1.58)	.5625-24	.633 (16.08)	.812 (20.62)	.345 (8.76)
12	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	.812 (20.62)	1.031 (26.19)	.120 (3.05)	.062 (1.58)	.6875-24	.802 (20.37)	.812 (20.62)	.345 (8.76)
14	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	.906 (23.01)	1.125 (28.57)	.120 (3.05)	.062 (1.58)	.8125-20	.927 (23.54)	.812 (20.62)	.345 (8.76)
16	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	.969 (24.61)	1.219 (30.96)	.120 (3.05)	.062 (1.58)	.9375-20	1.052 (26.72)	.812 (20.62)	.345 (8.76)
18	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	1.062 (26.97)	1.312 (33.32)	.120 (3.05)	.062 (1.58)	1.0625-18	1.177 (29.89)	.812 (20.62)	.345 (8.76)
20	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	1.156 (29.36)	1.438 (36.52)	.120 (3.05)	.062 (1.58)	1.1875-18	1.302 (33.07)	.812 (20.62)	.345 (8.76)
22	.609 (15.47)	.945 (24.00)	.539 (13.69)	.860 (21.84)	1.250 (31.75)	1.562 (39.67)	.120 (3.05)	.062 (1.58)	1.3125-18	1.427 (36.25)	.812 (20.62)	.345 (8.76)
24	.750 (19.05)	1.085 (27.55)	.493 (11.15)	1.000 (25.4)	1.375 (34.92)	1.688 (42.87)	.147 (3.73)	.078 (1.98)	1.4375-18	1.552 (39.42)	.781 (19.84)	.452 (11.48)

SJTP02RE

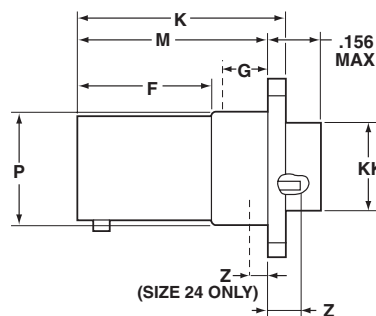


Shell Size	F +.000/- .005 (+.00/- .01)	K +.006/- .000 (+.15/- .00)	M +.000/- .005 (+.00/- .04)	R (TP)	S +.011/- .010 (±.04/- .04)	T +.005/- .005 (+.01/- .01)	Z +.031/- .031 (+.07/- .07)	P Diameter +.001/- .005 (+.00/- .01)	KK Diameter +.005/- .002 (+.01/- .00)	G Max.
8	.609 (15.47)	.945 (24.00)	.860 (21.84)	.594 (15.09)	.812 (20.62)	.120 (3.05)	.062 (1.58)	.516 (13.11)	.417 (10.59)	.345 (8.76)
10	.609 (15.47)	.945 (24.00)	.860 (21.84)	.719 (18.26)	.938 (23.82)	.120 (3.05)	.062 (1.58)	.633 (16.08)	.538 (13.66)	.345 (8.76)
12	.609 (15.47)	.945 (24.00)	.860 (21.84)	.812 (20.62)	1.031 (26.19)	.120 (3.05)	.062 (1.58)	.802 (20.37)	.663 (16.84)	.345 (8.76)
14	.609 (15.47)	.945 (24.00)	.860 (21.84)	.906 (23.01)	1.125 (28.57)	.120 (3.05)	.062 (1.58)	.927 (23.54)	.787 (19.99)	.345 (8.76)
16	.609 (15.47)	.945 (24.00)	.860 (21.84)	.969 (24.61)	1.219 (30.96)	.120 (3.05)	.062 (1.58)	1.052 (26.72)	.912 (23.16)	.345 (8.76)
18	.609 (15.47)	.945 (24.00)	.860 (21.84)	1.062 (26.97)	1.312 (33.32)	.120 (3.05)	.062 (1.58)	1.177 (29.89)	1.030 (26.16)	.345 (8.76)
20	.609 (15.47)	.945 (24.00)	.860 (21.84)	1.156 (29.36)	1.438 (36.52)	.120 (3.05)	.062 (1.58)	1.302 (33.07)	1.154 (29.31)	.345 (8.76)
22	.609 (15.47)	.945 (24.00)	.860 (21.84)	1.250 (31.75)	1.562 (39.67)	.120 (3.05)	.062 (1.58)	1.427 (36.25)	1.279 (32.49)	.345 (8.76)
24	.750 (19.05)	1.085 (27.55)	1.000 (25.4)	1.375 (34.92)	1.688 (42.87)	.147 (3.73)	.078 (1.98)	1.552 (39.42)	1.404 (35.66)	.452 (11.48)

All dimensions in inches (millimeters in parenthesis)

RECEPTACLES

SJT07RT

JN1003A

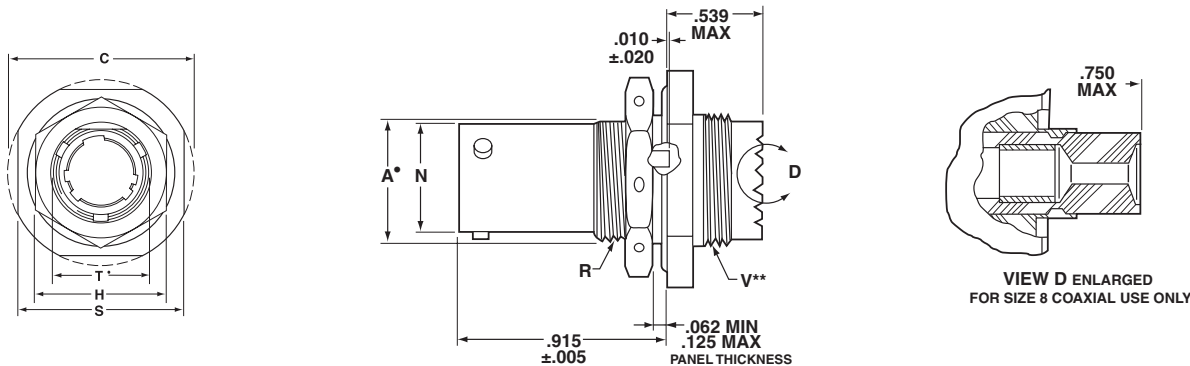





SHELL SIZE	C MAX.	A +.001/-0.010 (+0.00/-0.25)	H HEX. +.017/-0.016 (+0.43/-0.41)	S +.016/-0.016 (+0.41/-0.41)	T +.010/-0.000 (+0.25/-0.00)	V THREAD CLASS 2A (PLATED UNEF)	R THREAD CLASS 2A (PLATED UNEF)	N +.001/-0.005 (+0.000/-0.01)
8	1.078 (27.38)	.542 (13.77)	.750 (19.05)	.938 (23.82)	.572 (14.52)	.5625-24	.5625-24	.473 (12.61)
10	1.203 (30.56)	.669 (16.92)	.875 (22.22)	1.062 (26.97)	.697 (17.70)	.6875-24	.6875-24	.590 (14.99)
12	1.391 (35.33)	.830 (21.08)	1.062 (26.97)	1.250 (31.75)	.884 (22.45)	.8125-20	.8750-20	.750 (19.05)
14	1.515 (38.48)	.955 (24.26)	1.188 (30.17)	1.375 (34.92)	1.007 (25.58)	.9375-20	1.0000-20	.875 (22.22)
16	1.641 (41.68)	1.084 (27.53)	1.312 (33.32)	1.500 (38.10)	1.134 (28.80)	1.0625-18	1.1250-18	1.00 (25.40)
18	1.766 (44.86)	1.208 (30.68)	1.438 (36.52)	1.625 (41.27)	1.259 (31.98)	1.1875-18	1.2500-18	1.125 (28.57)
20	1.953 (49.61)	1.333 (33.86)	1.562 (39.67)	1.812 (46.02)	1.384 (35.15)	1.3125-18	1.3750-18	1.250 (31.75)
22	2.078 (52.78)	1.459 (37.06)	1.688 (42.87)	1.938 (49.22)	1.507 (38.28)	1.4375-18	1.5000-18	1.375 (34.92)
24	2.203 (55.96)	1.580 (40.13)	1.812 (46.62)	2.062 (52.37)	1.634 (41.50)	1.4375-18	1.6250-18	1.500 (38.10)

Thread sizes are SJT only, consult factory for JN1003A.

All dimensions in inches (millimeters in parenthesis)

PLUGS

SJT06RT
SJTG06RT
JN1003FG

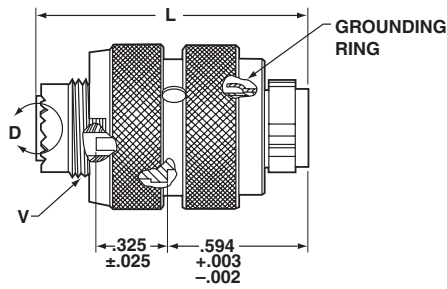

SHELL SIZE	L MAX.	Q MAX.	V THREAD	
			CLASS 2A (PLATED UNEF)	MODIFIED MAJOR DIAMETER
8	1.219 (30.96)	.734 (18.64)	.4375-28	.412 - .417
10	1.219 (30.96)	.844 (21.44)	.5625-24	.542 - .538
12	1.219 (30.96)	1.016 (25.81)	.6875-24	.667 - .663
14	1.219 (30.96)	1.141 (28.98)	.8125-20	.791 - .787
16	1.219 (30.96)	1.265 (32.13)	.9375-20	.916 - .912
18	1.219 (30.96)	1.391 (35.33)	1.0625-18	1.034 - 1.030
20	1.219 (30.96)	1.500 (38.10)	1.1875-18	1.158 - 1.154
22	1.219 (30.96)	1.625 (41.28)	1.3125-18	1.283 - 1.279
24	1.258 (31.95)	1.750 (44.45)	1.4375-18	1.408 - 1.404

All dimensions in inches (millimeters in parenthesis)