


SURE-SEAL® IP67 CONNECTOR SERIES

Get Down and Dirty

Water and Oil Resistant Connectors for Industrial Demands





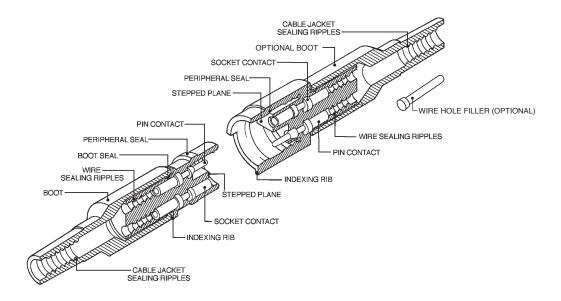

HOW TO SELECT/ORDER SURE-SEAL® CONNECTORS & ACCESSORIES

STEP 1. Choose series: Standard Sure-Seal®, Mini Sure-Seal®, or Power Sure-Seal®

Determine number of circuits required per connector:

STEP 2.

1 to 10 in Standard Sure-Seal® - 15 Amps per contact
2 to 4 in Mini Sure-Seal® - 8 Amps per contact
1 in Power Sure-Seal® - 85 Amps per contact

STEP 3. Select Sure-Seal® body style: straight or flanged plug and receptacle.

STEP 4. Select connector accessories for strain relief, mounting, tooling, etc.



TABLE OF CONTENTS

Introduction
Market Applications
Standard Sure-Seal® Series
One Circuit
Two Circuit
Three Circuit
Four Circuit
Five Circuit
Six Circuit
Seven Circuit
Eight Circuit
Nine Circuit
Ten Circuit
Mini Sure-Seal® Series
Two Circuit
Three Circuit
Four Circuit
Power Sure-Seal® Series
One Circuit
Contacts, Range, & Tooling Information
Dimensions
Assembly Instructions

DIRT-DEFYING CONNECTIVITY

Connectors Engineered for the Grittiest Environments

Sure-Seal® connectors offer an unbeatable solution for industrial environments that demand robust, sealed connectivity. These connectors go beyond mere splash-proofing; they're truly submersible, meeting IP67 and DIN 400 50 standards. Whether it's marine applications or offshore oil rigs facing corrosive saltwater and extreme weather, Sure-Seal® rises to the challenge. They withstand temperatures ranging from -40°F to +221°F, excelling amidst humidity, vibration, and exposure to harsh substances like those found in mining or construction fields.

Maintaining sealing integrity even in the face of brake fluid, gasoline, diesel fuel, antifreeze, ultraviolet, ozone, and steam, Sure-Seal® proves its resilience. And with only two parts needed— the connector body and the contacts—installation is straightforward and hassle-free.

These connectors don't just meet standards; they exceed them. Sure-Seal® connectors comply with DOT requirements for shock, vibration, temperature cycling, saltwater spray and immersion, petroleum derivatives, and industrial gas. They also ensure low milli-volt drop and low contact resistance, ensuring reliable performance in any condition.

You can choose from three versions to best suit your needs: Standard Sure-Seal®, Mini Sure-Seal®, or Power Sure-Seal®. Each variant promises the same level of quality and protection, tailored to fit various applications with precision.

SURE-SEAL® SOLUTIONS

- LOW INSTALLATION COST
- RESISTANT TO AUTOMOTIVE/ INDUSTRIAL ENVIRONMENTS
- WIDE RANGE OF WIRE GAUGES
 AND CURRENT CARRYING CAPABILITY
- WATER SUBMERSIBLE
- ONE-PIECE CONNECTOR
- FIELD SERVICEABLE
- POLARIZED AGAINST MIS-MATES
- THREE VERSIONS AVAILABLE

MARKET APPLICATIONS













CIRCUIT







View from mating face

pin socket

Sure-Seal® connectors
use a combination of pin
and socket contacts in
each connector.



Do you need technical assistance? Contact us!



PLUGS

RECEPTACLES






ACCESSORIES







Wire Hole Filler


CONTACTS


















MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221 °F (+115 °C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING









^{*}Contact us about automatic tooling options at sales@suresealconnections.com







View from mating face

Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!







RECEPTACLES



ACCESSORIES




Mounting Ring Mounts non-flanged receptacle



Boot Provides strain relief and additional sealing



Mounting Plate Secures flange to box



Wire Hole Filler

029-0263-000

Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting


CONTACTS
















030-2196-000

110238-0040 (5K Reel)

MATERIALS & FINISHES

	~
Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
- 1	

TOOLING

Color









Black

^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



MATERIALS & FINISHES

Do you need technical assistance? Contact us!



PLUGS





RECEPTACLES



ACCESSORIES




Mounting RingMounts non-flanged receptacle



BootProvides strain relief and additional sealing



Mounting Plate
Secures flange to box



Wire Hole Filler

029-0262-000

Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting


CONTACTS















030-2196-000

110238-0040 (5K Reel)

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11 ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling

TOOLING

Number of Circuits

Contact Insertion

Contact Retention

Polarization

Color

Agency Listing





Removable, 5 cycles minimum

UL (E176866) & CSA (LR109871-1)

7.5 lbs. (35 N) minimum

Black



From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine.

Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body

Replacement Tip 317-1153-015 (insulation) 317-1153-017 (non-insulation)

^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!







RECEPTACLES



ACCESSORIES




Mounting Ring Mounts non-flanged receptacle



Boot Provides strain relief and additional sealing



Mounting Plate Secures flange to box



Wire Hole Filler

029-0262-000

Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting


CONTACTS













See assembly instructions



030-2196-000

110238-0040 (5K Reel)

MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈1P67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221 °F (+115 °C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10

TOOLING

Contact Insertion

Contact Retention

Polarization

Color

Agency Listing





Removable, 5 cycles minimum

UL (E176866) & CSA (LR109871-1)

7.5 lbs. (35 N) minimum

Black



From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine.

Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body



^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!





RECEPTACLES



ACCESSORIES




Posi-Lok Mounting ClipProvides a secure lock and allows
for free hanging cable mounting



Mounting RingMounts non-flanged receptacle



BootProvides strain relief and additional sealing



Wire Hole Filler


CONTACTS














on page 37





MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221 °F (+115 °C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING







Replacement Tip 317-1153-015 (insulation) 317-1153-017 (non-insulation)

^{*}Contact us about automatic tooling options at sales@suresealconnections.com







View from mating face
pin socket

Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!



PLUGS



RECEPTACLES



ACCESSORIES




Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting



Mounting RingMounts non-flanged receptacle



BootProvides strain relief and additional sealing



Wire Hole Filler


CONTACTS


















MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221 °F (+115 °C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING









^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!





RECEPTACLES



ACCESSORIES




Posi-Lok Mounting ClipProvides a secure lock and allows
for free hanging cable mounting



Mounting RingMounts non-flanged receptacle



BootProvides strain relief and additional sealing



Wire Hole Filler


CONTACTS


















MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221 °F (+115 °C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING









^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!







RECEPTACLES



ACCESSORIES



Mounting Ring Mounts non-flanged receptacle




317-8657-002

Boot Provides strain relief and additional sealing



Mounting Plate Secures flange to box



Wire Hole Filler

026-0451-000

Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting


CONTACTS













on page 37





MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING









^{*}Contact us about automatic tooling options at sales@suresealconnections.com

QCIRCUIT







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!



PLUGS





RECEPTACLES



ACCESSORIES




Mounting Ring Mounts non-flanged receptacle



Boot Provides strain relief and additional sealing



Mounting Plate Secures flange to box



Wire Hole Filler

026-0451-000

Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting


CONTACTS













See assembly instructions

on page 37







MATERIALS & FINISHES

Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING









^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!



PLUGS





RECEPTACLES



ACCESSORIES




Mounting Ring Mounts non-flanged receptacle



Boot Provides strain relief and additional sealing



Mounting Plate Secures flange to box



Wire Hole Filler

026-0451-000

Posi-Lok Mounting Clip Provides a secure lock and allows for free hanging cable mounting


CONTACTS













on page 37







MATERIALS & FINISHES

MAILKIALS & I II41511L	5
Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	15 A
Wire Range Sizes	14-18 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11 ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1 to 10
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING









^{*}Contact us about automatic tooling options at sales@suresealconnections.com







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!




PLUGS

RECEPTACLES





ACCESSORIES



Wire Hole Filler

CONTACTS







Insulation Support:
Crimps contact to wire and insulation
Strip Length Inches (mm): .118 - .130 (3.00 - 3.30mm)

See assembly instructions on page 37

MATERIALS & FINISHES

MAIERIALS & FIINISHE	3
Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	8 A
Wire Range Sizes	18-20 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11 ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	2 to 4
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum

TOOLING

Contact Retention

Polarization

Agency Listing
Color



195-8508-014 Receptacle



7.5 lbs. (35 N) minimum

Black

UL (E176866) & CSA (LR109871-1)



Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body



^{*}Contact us about automatic tooling options at sales@suresealconnections.com

3 CIRCUIT







nating face

socket

Notice that all multi-pin

Sure-Seal® connectors

use a combination of pin

and socket contacts in
each connector.



Do you need technical assistance? Contact us!




PLUGS

RECEPTACLES





ACCESSORIES



Wire Hole Filler

CONTACTS







Insulation Support:
Crimps contact to wire and insulation
Strip Length Inches (mm): .118 - .130 (3.00 - 3.30mm)

See assembly instructions on page 37

MATERIALS & FINISHES

MAILKIALS & III 11511L	
Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	8 A
Wire Range Sizes	18-20 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221 °F (+115 °C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	2 to 4
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

TOOLING



Holding Block 195-8508-015 Plug 195-8508-016 Receptacle







^{*}Contact us about automatic tooling options at sales@suresealconnections.com









Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!




PLUGS

RECEPTACLES





ACCESSORIES



Wire Hole Filler

CONTACTS







Insulation Support:
Crimps contact to wire and insulation
Strip Length Inches (mm): .118 - .130 (3.00 - 3.30mm)

See assembly instructions on page 37

MATERIALS & FINISHES

MAIERIALS & FINISHE	
Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	8 A
Wire Range Sizes	18-20 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11 ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	2 to 4
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)

TOOLING

Color










Black

^{*}Contact us about automatic tooling options at sales@suresealconnections.com

CIRCUIT







Notice that all multi-pin Sure-Seal® connectors use a combination of pin and socket contacts in each connector.



Do you need technical assistance? Contact us!



PLUGS





120-1903-000

4 AWG

RECEPTACLES



8-10 AWG

CONTACTS



4 AWG



8-10 AWG











Strip Length Inches (mm): (4 AWG): .460 - .480 (11.7 - 12.2mm) (8-10 AWG): .515 - .535 (13.1 - 13.6mm)

See assembly instructions on page 37

MATERIALS & FINISHES

MATERIALS & FINISHE	S
Body	Elastomeric material (PVC Nitrile standard, also available in EPDM)
Contacts	Copper alloy
Contact Plating	Tin standard; gold-plating optional
ELECTRICAL DATA	
Operating Voltage	400 Vac Maximum
Dielectric Withstanding Voltage	1,200 Vac at sea level
Current Rating	85 A
Wire Range Sizes	4; 8-10 AWG
Contact Resistance	10 Milliohms maximum
Insulation Resistance	100 Megohms (minimum)
Contacts Included	No
MECHANICAL DATA	
Operating Temperature	-40°F to + 221°F (-40°C to +105°C)
Sealing	≈IP67, DIN 400 50, 3 foot depth in 5% salt solution, 24 hours min. ≈NEMA 6 p
Wire Sealing Range	See page 31
Insulation Strip Lengths	See page 32
Mating Life	50 cycles minimum (stamped & formed) 100 cylces (machined)
Salt Spray	To MIL-STD-202D Method 101D
Heat	+221°F (+115°C) for 1,000 hours
Weather, Ozone & Ultraviolet	In accordance with ASTM D-1149 (100pphm) & ASTM D-1171 (outdoor exposure)
Vibration	5 to 55 Hz .06" DA 1 hour; radial & longitudal axes
Shock	50g 11 ms, 30 cycles; radial & longitudal axes
Contact Type	Crimp: using hand or semi-automatic tooling
Number of Circuits	1
Contact Insertion	From rear with simple hand tool or simultaneous insertion of multiple contacts with semi-automatic insertion machine. Removable, 5 cycles minimum
Contact Retention	7.5 lbs. (35 N) minimum
Polarization	Stepped plane positive polarization, indexing ribs, and visual polarization all permanently molded into body
Agency Listing	UL (E176866) & CSA (LR109871-1)
Color	Black

^{*}Contact us about tooling options at sales@suresealconnections.com

	RANGE TOOLING						
CONTACT STYLE	AWG WIRE SIZE	WIRE INSULATION DIAMETER	WIRE HOLE FILLER ₍₁₎	INSERTION TOOL ₍₂₎	CRIMP TOOL ₍₃₎		
STANDARD SURE-SEAL® INSULATION SUPPORT							
Tin Plating (Standard) Gold Plating	14-18	.100147in (2.54 - 3.73mm)	225-0093-000	Replacement tip 317-1153-017	Replacement locator 1181-92015		
				SSI-T-TOOL or 070306-0000	SSI-CS10		
STANDARD SURE-SEAL	® NON-INSULATION	N SUPPORT					
Tin Plating (Standard) Gold Plating	14-18	.100147in (2.54 - 3.73mm)	225-0093-000	Replacement tip 317-1153-015	Replacement locator 1181-92015		
				SS-T-TOOL or 070235-0001	SS-CS10		
MINI SURE-SEAL® INSU	LATION SUPPORT	Г	'	'	'		
Tin Plating (Standard)	10.00	.055071 in	225-1012-000	Replacement tip MSS2000-TIP	Replacement locator 1181-89005		
Gold Plating	18-20	(1.40 - 1.80mm)	223-1012-000	MSS-T-TOOL or MSS-2000	MSS-CS10		
POWER SURE-SEAL®							
	4	.247380in (6.96 - 9.65mm)	-	CIT-VE4-6			
	6	(-				
	8	150 045	-				
	.159245in (4.04 - 6.22mm)		-	CIT-VE-8-10			

Wire Hole Fillers: These fillers are inserted into unused cavities in place of a contact. Wire hole fillers are required to retain the watertight sealing if less than a full compliment of contacts are to be used.

INDEX		CONTACTS		WIRE		
CONTACT STYLE	AWG WIRE SIZE	LOOSE PINS	LOOSE SOCKET	STRIP LENGTH INCHES (MM)		
STANDARD SURE-SEAL® INSULATION SUPPORT						
Tin Plating (Standard)	14-18	030-2196-001	031-1267-001	.155185		
Gold Plating	14-18	030-2193-006	031-1267-005	(3.94 - 4.70mm)		
STANDARD SURE-SEAL®	NON-INSULATION SU	JPPORT				
				.185220		
Tin Plating (Standard)	14-18	030-2196-000	031-1267-000	(4.70 - 5.59mm)		
Gold Plating	14-18	030-2196-008	031-1267-007			
MINI SURE-SEAL® INSULA	ATION SUPPORT					
RoHS				.118130		
	18-20	330-8672-100	031-8703-100	(3.00 - 3.30mm)		
POWER SURE-SEAL®						
				.460480 (11.7 - 12.2mm)		
	4	030-2245-002	031 - 1295 - 001			
	6	030-2245-001	031-1294-001	Note:		
	8	030-2244-001	031-1299-001	6 AWG & 10 AWG socket contacts have unique strip lengths .515535		
	10	030-2244-002	031-1298-001	(13.1 - 13.6)		


⁽²⁾ Insertion Tool: An Insertion tool is required to insert contacts into the connector. These tools are heavy duty production hand tools. A holding block should also be used during the insertion process. An extraction tool is not required. See assembly instructions (pages 37-38). Semi-Automatic insertion tools are also available.


⁽³⁾ Hand Crimp Tools: These are heavy duty tools with a ratchet mechanism that will only release the contact when the crimp is completed. These tools produce consistent, high quality crimps. They are the only hand crimping tools recommended for Sure-Seal® contacts.

STANDARD SURE-SEAL® PLUGS & RECEPTACLES

1 CIRCUIT









PLUG P/N 120-1832-000

RECEPTACLE P/N 120-1833-000

2 - 4 CIRCUIT







PLUG


RECEPTACLE


BODY IDENTIFIER	PLUG NUMBER (P)	receptacle number (r)	A DIA MAX.	B DIA MAX.	C MAX.
SS-1 P/R	120-1832-000	120-1833-000	.380 (9.65)	.550 (13.97)	.230 (5.84)
SS-2 P/R*	120-1807-000	120-1804-000	.550 (13.97)	.710 (18.03)	.430 (10.92)
SS-3 P/R*	120-1808-000	120-1805-000	.600 (15.24)	.760 (19.30)	.500 (12.70)
SS-4 P/R*	120-1809-000	120-1806-000	.600 (15.24)	.760 (19.30)	.500 (12.70)

^{*} Can use heat shrink boot: LSB1 for cable range .40 - .12 All dimensions in inches (millimeters in parentheses)

5 - 10 CIRCUIT







BODY IDENTIFIER	PLUG NUMBER (P)	RECEPTACLE NUMBER (R)	A DIA MAX.	B DIA MAX.	C MAX.	D MAX.
SS-5 P/R*	120-1841-000	120-1839-000	1.010 (25.65)	1.160 (29.46)	.810 (20.57)	1.610 (40.89)
SS-6 P/R*	120-1842-000	120-1840-000	1.010 (25.65)	1.160 (29.46)	.810 (20.57)	1.610 (40.89)
SS-7 P/R*	120-1873-000	120-1874-000	1.010 (25.65)	1.160 (29.46)	.810 (20.57)	1.610 (40.89)
SS-8 P/R*	120-1865-000	120-1866-000	1.135 (28.83)	1.285 (32.64)	.935 (23.75)	1.610 (40.89)
SS-9 P/R*	120-1867-000	120-1868-000	1.135 (28.83)	1.285 (32.64)	.935 (23.75)	1.610 (40.89)
SS-10 P/R*	120-1869-000	120-1870-000	1.135 (28.83)	1.285 (32.64)	.935 (23.75)	1.610 (40.89)


^{*} Can use heat shrink boot: SB2 for cable range 1.01 - .290 All dimensions in inches (millimeters in parentheses)


FLANGED PLUGS

2 - 4 CIRCUIT



Use with Mounting Plate #066-8516-000







BODY IDENTIFIER	PLUG NUMBER	A DIA. +.012 (.3)	B DIA. +.008 (.2)	C DIA. +.012 (.3)	D DIA. +.012 (.3)	E .008 (.2)
SSF-2P	120-8552-200	.547 (13.9)	.524 (13.3)	.425 (10.8)	.307 (7.8)	.039 (1.0)
SSF-3P	120-8552-201	.598 (15.2)	.583 (14.8)	.484 (12.3)	.315 (8.0)	.020 (.50)
SSF-4P	120-8552-202	.598 (15.2)	.583 (14.8)	.484 (12.3)	.354 (9.0)	.039 (1.0)

All dimensions in inches (millimeters in parentheses)

8 - 10 CIRCUIT








Use with Mounting Plate #066-8516-002 or #066-8516-003


BODY IDENTIFIER	PLUG NUMBER
SSF-8P	120-8552-305
SSF-9P	120-8552-306
SSF-10P	120-8552-307

MINI SURE-SEAL® PLUGS & RECEPTACLES

2 - 4 CIRCUIT







RECEPTACLE

34

BODY IDENTIFIER	PLUG NUMBER (P)	RECEPTACLE NUMBER (R)	A DIA. MAX.	B DIA. MAX.	C DIA. MAX.	D MAX.
MSS-2 P/R*	120-8552-100	120-8551-100	.340 (8.64)	.390 (9.91)	.540 (13.72)	.660 (16.6)
MSS-3 P/R*	120-8552-101	120-8551-101	.360 (9.15)	.420 (10.67)	.580 (14.74)	.550 (13.97)
MSS-4 P/R*	120-8552-102	120-8551-102	.360 (9.15)	.450 (11.43)	.610 (15.50)	.550 (13.97)

^{*} Can use heat shrink boot : LSB1 for cable range .40 - .12 All dimensions in inches (millimeters in parentheses)


POWER SURE-SEAL® PLUGS & RECEPTACLES

PLUG



BODY IDENTIFIER	PART NUMBER	AWG SIZE
SS-1P-4	120-1905-000	#4 or #6
SS-1P-8	120-1906-000	#8 or #10

Order socket contacts

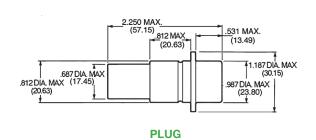


RECEPTACLE



BODY IDENTIFIER	PART NUMBER	AWG SIZE
SS-1R-4	120-1903-000	#4 or #6
SS-1R-8	120-1904-000	#8 or #10


Order pin contacts

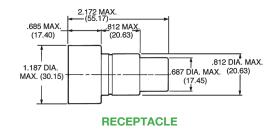

ACCESSORIES

BOOT





Fits over the rear of the connector and seals the jacket of a multi-conductor cable.
Also provides additional strain relief and abrasion resistance.


BODY IDENTIFIER	PART NUMBER	B DIA. MAX.	CABLE O.D.	K REF.	D DIA. MAX.
SS-2 Boot	317-1398-000	.650 (16.51)	.208228 (5.28-5.79)	2.050 (52.07)	.380 (9.65)
SS-3 Boot+	317-1397-000	.610 (15.50)	.220240 (5.59-6.10)	2.050 (52.07)	.380 (9.65)
SS-4 Boot+	317-1399-000	.750 (19.05)	.345380 (8.76-9.65)	2.050 (52.07)	.500 (12.70)
SS-5-7 Boot	317-8657-000	1.063 (27.00)	.283331 (7.20-8.40)	2.441 (62.00)	.492 (12.50)
SS-8-10 Boot	317-8657-002	1.220 (31.00)	.394488 (10.00-12.40)	2.480 (63.00)	.732 (18.60)

- * Note: In addition to boot, remember to use 225-0093-000 Wire Hole Fillers to fill any unused contact cavities.
- May be used to cover industry standard BNC crimp style plugs. Contact us for more information.
 Shrink boots available. 120-2G & SB2. Contact us for details.

MOUNTING RING



A Mounting Ring snaps into an appropriate sized hole in a panel or bracket and allows a non-flanged plug or receptacle to be panel mounted.





PART NUMBER	A DIA. MAX.	B DIA. MAX.	C DIA. MAX.	F MAX.	H REF.	L MAX.	HOLE DIAMETER	PANEL THICKNESS
351-1640-000	.410 (10.41)	1.275 (32.39)	.790 (20.07)	.230 (5.84)	.055 (1.40)	.690 (17.53)	.781	
351-1641-000	.470 (12.06)	1.275 (32.39)	.790 (20.07)	.230 (5.84)	.055 (1.40)	.690 (17.53)	(19.84)	.060
351-1633-000	.755 (19.05)	2.200 (56.64)	1.445 (36.70)	.330 (8.38)	.065 (1.65)	.830 (21.08)	1.50	(1.52)
351-1634-000	.875 (22.23)	2.200 (56.64)	1.445 (36.70)	.330 (8.38)	.065 (1.65)	.830 (21.08)	(38.12)	


All dimensions in inches (millimeters in parentheses)


MOUNTING PLATE

FOR 2 – 4 CIRCUIT PLUG





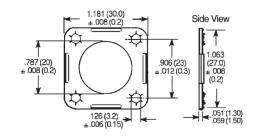





Use Nut Plate part number M85528/2-14A.
Use Sealing Screws for mounting.


FOR 8 – 10 CIRCUIT PLUG












Use Nut Plate part number M85528/2-18A. Use Sealing Screws for mounting.

MOUNTING CLIP (STANDARD ONLY)

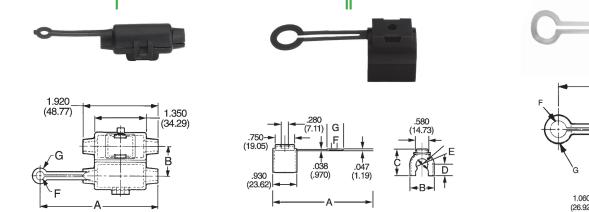


STYLE	BODY IDENTIFIER	PART NUMBER	COLORS	A MAX.	B +/01	С	D	Е	F MAX.	G MAX.
I	SS-1C	026-0452-000	Black	3.185 (80.89)	.740 (18.80)	-	_	-	.210 (5.33)	.390 (9.91)
II	SS-2C	029-0263-000	Red	2.443 (62.04)	.886 (22.50)	1.000 (25.40)	.420 (10.67)	.420 (10.67)	.400 (10.16)	.650 (16.51)
II	SS-3-4C	029-0262-000	Yellow	2.443 (62.04)	.926 (23.52)	1.053 (26.74)	.450 (11.43)	.480 (12.19)	.400 (10.16)	.650 (16.51)
III	SS-5-7C	026-0450-000	Natural	3.045 (77.34)	1.395 (35.43)	-	-	-	.610 (15.49)	.910 (23.11)
III	SS-8-10C	026-0451-000	Black	3.045 (77.34)	1.520 (38.61)	_	_	-	.660 (16.76)	.960 (24.38)

All dimensions in inches (millimeters in parentheses)

ASSEMBLY INSTRUCTIONS ASSEMBLY INSTRUCTIONS

WIRE AND JACKETED CABLE PREPARATION



Strip wires to appropriate length.

If using a boot, strip jacket so no more than listed dimension is exposed when contact is fully

Note: Try stripping back jacket approximately 1.25 inches (32mm) because strip lengths will vary depending on cable
being used.

# CIRCUITS	MAX EXPOSED LENGTH INCHES (MM)
2, 3, 4	.87 (22)
5, 6, 7	1.02 (26)
8, 9, 10	1.02 (26)

MANUAL INSERTION OF CONTACTS



STEP 1: Affix proper connector holding block to stable surface (i.e. vice or table).



STEP 2: If a jacket wire sealing boot is to be used, it must be slid up the cable (isopropyl alcohol will help in doing this).



STEP 3: Dip connector in isopropyl alcohol and place in holding block with the back end up (wire side).



STEP 4: Using the proper contact insertion tool **A.** Place contact in groove of tool **B.** Make sure that the end of the tool is up against the shoulder of the contact.



STEP 5: Insert contact into proper cavity of the connector body by applying constant pressure until contact snaps into place. Isopropyl alcohol will help in doing this. (Warning: Do not tilt the tool during the insertion).



STEP 6: Insert all remaining contacts. To insure environmental sealing of the connector any empty contact cavities must be filled with wire hole fillers.



STEP 7: Check mating side of the connector to be sure that all contacts are on the same plane (fully inserted).



STEP 8: If you are using jacket sealing boot, slide the boot down the cable and onto the connector



STEP 9: Remove connector and wire assembly from holding block.

EXTRACTION OF CONTACTS



STEP 1: Slide up any rear accessories (i.e. jacket cable sealing boots). Using isopropyl alcohol will help you slide these up your cable.

STEP 2: Grasp individual wire firmly and gently pull the contact out of the connector. *Extraction tool is available, DRK32 & DRK152, contact us for more information.

HAND CRIMP TOOL OPERATION

The Sure-Seal® hand crimp tool has a full cycle ratchet controlled release and straight action crimp jaws. The flap locator makes it easy to load the terminal and the pre-positioner assures that the terminal is loaded for proper crimping. To open the tool, you must apply force to the handles to allow the tool to spring open.



Open proper hand crimper (see Contacts & Tooling) by squeezing handles until handles spring open.



Open flap locator. Insert contact up to stop. Make sure contact is inserted properly.



Close flap locator.



Press pre-positioner firmly downward for contact alignment (crimp area should be facing upward).



Pre-close the handles.



STEP 6: Insert stripped wire into contact up to insulation stop.



STEP 7: Squeeze handles until they pop open. Remove contact from the locator.

HAND TOOL	CONTACT TYPE	FOR CO	WIRE STRIP LENGTH		
PART NUMBER		PIN	SOCKET		
SSI-CS10	Insulation support	030-2196-001		.155185	
	insulation support	030-2196-006	031-1267-005	(4.0 - 4.7)	
SS-CS10	Non-insulation	030-2196-000	031-1267-000	.185220	
33-C310	support	030-2196-008	031-1267-007	(4.7 - 5.6)	


TOOL MAINTENANCE:


Maintenance and inspection should be performed regularly. The tool should be wiped clean with special emphasis on crimping cavities. The tool may be cleaned by immersing in a suitable commercial solvent or cleaner that does not attack paints or plastic material. The tool should be re-lubricated after cleaning using a light film of a medium weight oil on bearing surfaces and pivot pins. When not in use, keep handles closed to prevent objects from becoming lodged in the crimping dies. Store in a clean dry area.


CRIMP INSPECTION


Micro sections: Enlargement of micro section allows for final judgment of crimp quality. This test is recommended whenever new tools or new types of wire are used.

FOR STAMPED CONTACTS












38

FOR MACHINED CONTACTS



Correct Crimp

Incorrect Crimp

1 - Insulation

- 2 Strands
- 3 Contact
- 4 Wire inspection hole
- 5 Shoulder

NOTE: For accurate pull test results when crimping insulation support contacts (030-2196-001 & 031-1267-001), strip wire back .3" so that the insulation support tine does not crimp onto insulation.

TEST DATA

SURE-SEAL® CONNECTOR TEST DATA

Typical: Power Sure-Seal®, Standard Sure-Seal®, and Mini Sure-Seal® are essentially the same except for mechanical and amperage capacity differences. Sure-Seal® products are designed to meet specification CS-155. Items of most general interest to users and designers are listed below. With its current capability and large size, Power Sure-Seal® contacts and currents are covered in CS-169.

TEST	REFERENCE						E. 120				
DESCRIPTION	PARAGRAPH					REQUIREM	ENTS				
Environmental Sealing	3.5.1		ctors when mated sho rsion in 3 feet depth i			vater, moisture, aque	ous solutions, oils an	d certain chemic	als as well as dust and a	dirt	
		The minimum tensil	e load required to se	parate the wire from	m the contact, either	by pulling the wire o	ut of the crimp joint o	r breaking the wi	re within the crimp joint	, shall not be less than the	
		applicable limits as	The minimum tensile load required to separate the wire from the contact, either by pulling the wire out of the crimp joint or breaking the wire within the crimp joint, shall not be less than the applicable limits as specified. Wire breakage, or contact damage not due to crimping, at less than tensile loads shall not constitute failure.								
					CRIMP TEN	ISILE STRENGTH	I, POUNDS MIN	MUMI			
		WIRE	WITHOUT	WITH	WIRE	WITHOUT	WITH	WIRE	WITHOUT		
Contact Tensile Strength – Crimp	3.6.12	SIZE	INSULATION	INSULATION	SIZE	INSULATION	INSULATION SUPPORT	SIZE	INSULATION SUPPORT	WITH INSULATION	
olicingili – Crillip		AWG	SUPPORT CONTACTS	SUPPORT CONTACTS	AWG	SUPPORT CONTACTS	CONTACTS	AWG	CONTACTS	SUPPORT CONTACTS	
		4	140	-	10	80	-	18	25	25	
		6	100	-	14	35	35	20	-	20	
		8	90	-	16	35	35	-	-	-	
		Properly assembled	d and mated connect	ors shall be tested i	in accordance with	MIL-STD-202, Metho	od 302, except a pot	ential of 500 ± 1	5 volt DC shall be used	. The resistance shall be	
Insulation Resistance	4.4.1	placed wet on a co	operly assembled and mated connectors shall be tested in accordance with MIL-STD-202, Method 302, except a potential of 500 ± 15 volt DC shall be used. The resistance shall be easured between adjacent parts of contacts (or contacts to ground for SS-1) and shall not be less than 100 M. If the specimen has been immersed in fluid in the preceding test, it shall be acced wet on a conducting surface and insulation resistance measured within 5 minutes between each contact and also between each contact and the conducting surface (except for SS-1 to measured contact to ground while immersed).								
Dielectric Withstanding Voltage	4.4.2		ated connectors shall tage of 1200 ± 15 vo		of breakdown betw	een adjacent contact	s (or contact to groun	nd for SS-1) when	n tested in accordance	with MIL-STD-202, Method	
Contact Resistance	4.4.3	The contact resistan and MIL-STD-202,		shall be such that	the resistance meas	ured across the conta	cts and 5/8" behind	the crimp junctic	on shall not exceed 10 r	nΩ. Test current to be 1 amp,	
Shock	4.4.4	in each of X, Y & Z	,	shall be employed	to monitor the curr		,	•		re repeated three (3) times ted connectors, evidence of	
Vibration	4.4.5	body and vibrated another minute. The Six (6) hours Six (6) hours Six (6) hours Six (6) hours Six (6) hours Six (6) hours Six (6) hours	with a peak-to-peak e vibration shall be sv at 180°F (82°C) alc at 180°F (82°C) alc at room temperature at room temperature at -40°F (-40°C) alc at -40°F (-40°C) alc	amplitude of .25 in vept up and down ing the longitudinal ing a perpendicula along the longitudinal along a perpendiculation ong the longitudinal are including a perpendiculation ong a perpendiculation ong a perpendiculation ong a perpendiculation on the control of the contro	nch across a frequei for a total of 36 hou l axis r axis inal axis cular axis al axis ar axis	ncy range of 5 to 39h	Hz, and a ±20g acce g conditions:	leration across 3	9 to 55 Hz, swept up ir	om each end of the connector one minute and down in	
Durability	4.4.6	The connectors shall be subjected to 25 cycles of mating and unmating at -10°C and another 25 cycles at 50°C. There shall be no evidence of damage to the contacts, the contact plating, the insulators or sealing rings, which would be detrimental to connector function.									
Contact Retention	4.4.7		plug or receptacle h be tested separately.		dead weight of 7.5	lbs. shall be imposed	d on each wire for on	e minute without	the contacts being dislo	dged from the connector. Plugs	
Maintenance Aging	4.4.8					tion and extraction in will be subjected to t				e are to be tested separately.	
			ed and mated connec ne inch per minute. Th	ne sample shall fall	within the limits spe	cified as follows:	be applied to the wir	es of the plug un		oletely separated. The rate of	
Connector	4 4 33	CONNECTO	OR SIZE		TING FORCE (LBS	·	CONNECTOR S	IZE		FORCE (LBS.)	
Separating Force	4.4.11	SS-1		MAX. 12		MIN.	SS-4		MAX. 20	MIN.	
		SS-2		15		6	SS-5/7		30	10	
		SS-3		18		8	SS-8/10		55	10	
					licable fluids for the		,	the connectors s		lepth of 3 feet in salt water	
	4.4.10	for 24 hours at room	m temperature. At the	completion of the						eet the insulation resistance	
	4.4.13 4.4.14	requirements shall l	be cause for rejectior	ı.							
	4.4.14		Gasoline Sp			inute air dry for 80 c					
Solvent Resistance	4.4.15		Diesel Fuel S			inute air dry for 80 c		nt temperature.			
	4.4.17			Lubricating Oil		. 30 weight lubricatin	•				
	4.4.18		Antifreeze Brake Fluid			F (49°C) for 48 hour ambient temperature					
	4.4.19			ransmission Fluid ipor	Immersed at 120°	F (49°C) for 48 hour oline vapor atmosph	S.	ure for 48 hours			
Weather and Ozone Resistance	4.4.20					TMD-1149 except the cking or other degrae				hall be 7 days. Outdoor	
High Temperature Long-Term	4.4.23								llowing the test, they sho ments shall be cause for	all be subjected to 3 feet salt rejection.	
UV	-		Sure-Seal Connections has recently completed testing of the Sure-Seal® PVC Nitrile material (SM 3400-06) for UV resistance. The material was tested in accordance with ASTM G-26 (Xenon Arc), 720 hours exposure with no loss in tensile strength and greater than 75% retention of elongation.								

Caution: "Sure-Seal® connectors are rated for use between temperatures of -40 to + 105 degrees Celsius. However, if a Sure-Seal® connector is exposed for long periods of time to temperatures exceeding 85 degrees Celsius and is unmated, it may lose its environmental sealing integrity upon remating. Thus, we recommend that both the plug and receptacle be replaced if environmental sealing is required after remating."



SSC_PSG_01 Rev. 20250505