


REV	DESCRIPTION	DATE	APPRVD

PART NO.	SHELL SIZE	T _{UNC-2B} THR'D	A ± .003	B ± .010	D
AT192-3	3	4-40	.625	.925	.106/.166
AT192-6	6	4-40	.469	.755	.106/.166
AT192-7	7	4-40	.719	1.019	.106/.166
AT192-8	8	4-40	.594	.880	.106/.166
AT192-10	10	4-40	.719	1.019	.106/.166
AT192-12	12	4-40	.812	1.098	.106/.166
AT192-14	14	4-40	.906	1.192	.106/.166
AT192-16	16	4-40	.969	1.255	.106/.166
AT192-18	18	4-40	1.062	1.348	.106/.166
AT192-19	19	4-40	.906	1.192	.106/.166
AT192-20	20	4-40	1.156	1.500	.106/.166
AT192-22	22	4-40	1.250	1.593	.106/.166
AT192-23	23	4-40	1.375	1.750	.106/.166
AT192-24	24	6-32	1.375	1.750	.123/.183
AT192-25	25	6-32	1.500	1.812	.123/.183
AT192-27	27	4-40	.969	1.255	.106/.166
AT192-28	28	6-32	1.562	2.000	.106/.166
AT192-28-4	28	4-40	1.562	2.000	.123/.183
AT192-32	32	6-32	1.750	2.312	.123/.183
AT192-36	36	6-32	1.938	2.500	.123/.183
AT192-37	37	4-40	1.187	1.500	.106/.166
AT192-40	40	8-32	2.188	2.925	.128/.210
AT192-48	48	10-32	2.625	3.250	.140/.180
AT192-61	61	4-40	1.437	1.812	.106/.166

NOTES :

- MATERIAL - .040 ±.003 THICK 2024-T3 ALUMINIUM ALLOY PER QQ-A-250/4 OR .040±.003 THICK 6061-T6 ALUMINIUM ALLOY PER QQ-A-250/11.
- FINISH - ALODINE PER MIL-C-5541.
- NUT, SELF-LOCKING - CORROSION-RESISTING STEEL, WITH A DRY FILM LUBRICANT.

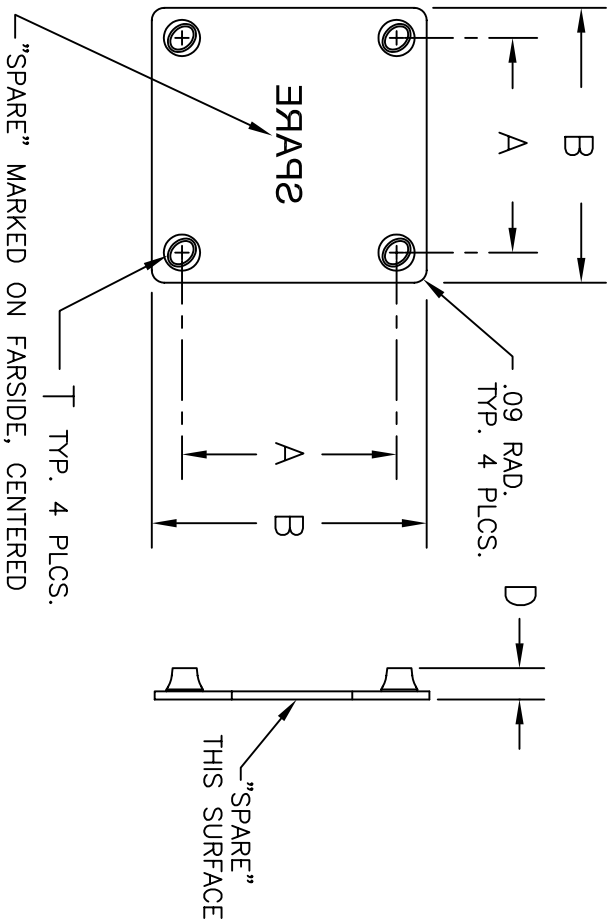

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CONTRACT NO.	
ANGLES ±		PREPARED	
FRACTIONS ±		DVH	
DECIMALS		05/06	
.XX ±			
.XXX ±			
AT192	USED ON	APPROVED	
NEXT ASSY		RELEASE	
APPLICATION		SCALE NONE	
		SIZE	CODE IDENT NO.
		B	0A554
		DRAWING NO.	
		AT192	
		REV	
		SHR 10F 1	

ABBOTEC
INCORPORATED
WEATHERFORD, TEXAS

NUT PLATE
BLANK "SPARE"