


PART NO.	SHELL SIZE	T ^{THRD}	A ±.003	B ±.010	C ^{+.015} _{-.000}	D	E ±.020	MATERIAL THICKNESS
AT801-5	5	2-56	.363	.593	.283	.080/.120	.133	.031 ± .003
AT801-6	6	2-56	.423	.656	.368	.080/.120	.193	.031 ± .003
AT801-7	7	2-56	.483	.718	.453	.080/.120	.250	.031 ± .003
AT801-8	8	2-56	.545	.765	.550	.080/.120	.325	.031 ± .003
AT801-9	9	4-40	.607	.906	.568	.106/.166	.312	.040 ± .003
AT801-10	10	4-40	.670	.950	.665	.106/.166	.380	.040 ± .003
AT801-13	13	4-40	.812	1.110	.858	.106/.166	.515	.040 ± .003
AT801-16	16	4-40	.981	1.281	1.093	.106/.166	.687	.040 ± .003
AT801-17	17	4-40	1.060	1.375	1.200	.106/.166	.750	.040 ± .003
AT801-21	21	4-40	1.205	1.485	1.325	.106/.166	.925	.040 ± .003

REV	DESCRIPTION	DATE	APPRVD
A	ADD NOTE 3	6-30-08	
B	ADD -8,-10,-21	2/12	
C	-8 E was .250	7/12	

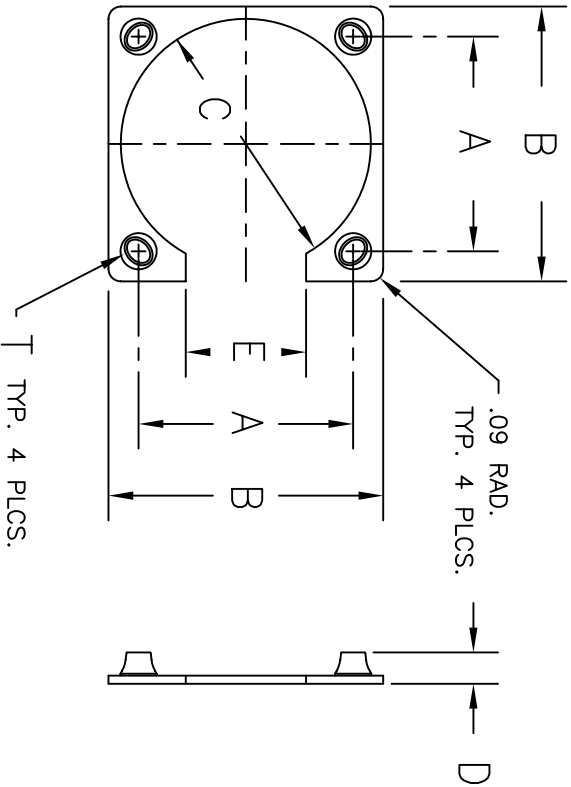

NOTES :

1. MATERIAL - 2024-T3 ALUMINUM ALLOY PER QQ-A-250/4 OR 6061-T6 ALUMINUM ALLOY PER QQ-A-250/11. SEE TABLE FOR THICKNESS.
2. FINISH - ALODINE PER MIL-C-5541, CLASS 1A.
3. NUT, SELF-LOCKING - CORROSION-RESISTING STEEL, WITH A DRY FILM LUBRICANT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:				CONTRACT NO.		 ABBOTTEC INCORPORATED WEATHERFORD, TEXAS	
FRACTIONS ± DECIMALS .XX ± .XXX ±				PREPARED	BS	2/05	NUT PLATE BLANK
				APPROVED			
				RELEASE			
NEXT ASSY USED ON APPLICATION				SIZE	CODE IDENT NO.	DRAWING NO.	REV
				B	0A554	AT801	C
				SCALE	NONE		SHT 1 OF 1