
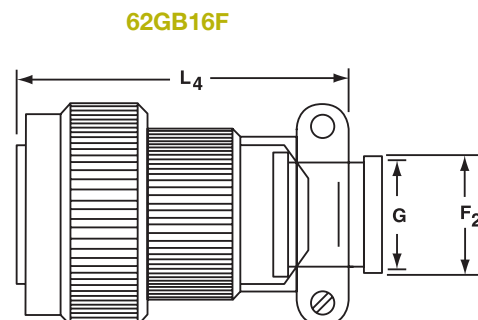
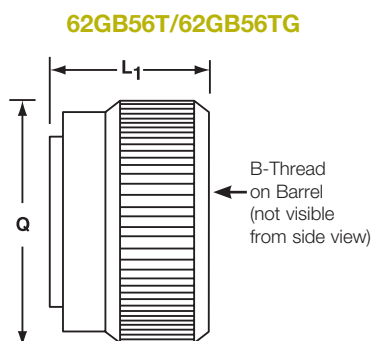

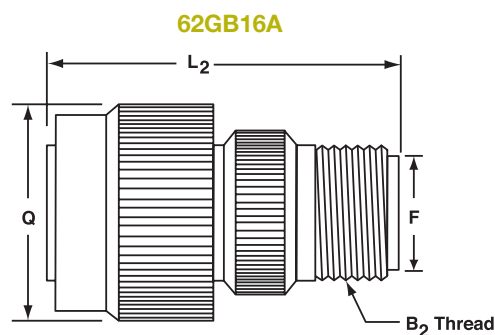


STRAIGHT PLUG



SHELL SIZE	62GB56T/62GB56TG		
	Q MAX.	L ₁ MAX.	B THREAD CLASS 2A
8	0.750 (19.1)	0.976 (24.8)	.4375-28 UNEF
10	0.859 (21.8)	0.976 (24.8)	.5625-24 UNEF
12	1.013 (25.7)	0.976 (24.8)	.6875-24 UNEF
14	1.156 (29.4)	0.976 (24.8)	.8125-20 UNEF
16	1.281 (32.5)	0.976 (24.8)	.9375-20 UNEF
18	1.319 (33.5)	0.976 (24.8)	1.0625-18 UNEF
20	1.531 (38.9)	0.976 (24.8)	1.1875-18 UNEF
22	1.656 (42.1)	0.976 (24.8)	1.3125-18 UNEF
24	1.777 (45.1)	0.976 (24.8)	1.4375-18 UNEF

62GB16A		
F	L ₂	B2 THREAD CLASS 2A
0.297 (7.5)	1.614 (41.0)	.5000-28 UNEF
0.421 (10.7)	1.614 (41.0)	.6250-24 UNEF
0.546 (13.9)	1.614 (41.0)	.7500-20 UNEF
0.663 (16.8)	1.614 (41.0)	.8750-20 UNEF
0.787 (20.0)	1.614 (41.0)	1.0000-20 UNEF
0.879 (22.3)	1.614 (41.0)	1.1875-18 UNEF
1.014 (25.8)	1.614 (41.0)	1.1875-18 UNEF
1.134 (28.8)	1.614 (41.0)	1.4375-18 UNEF
1.259 (32.0)	1.658 (42.1)	1.4375-18 UNEF

62GB16E	
L ₃	K MAX.
1.281 (32.5)	0.561 (14.2)
1.281 (32.5)	0.686 (17.4)
1.281 (32.5)	0.811 (20.6)
1.281 (32.5)	0.936 (23.8)
1.281 (32.5)	1.061 (26.9)
1.281 (32.5)	1.186 (30.1)
1.281 (32.5)	1.311 (33.3)
1.281 (32.5)	1.436 (36.5)
1.281 (32.5)	1.561 (39.6)

62GB16F		
F ₂	G	L ₄
0.240 (6.1)	0.156 (4.0)	1.752 (44.5)
0.302 (7.7)	0.188 (4.8)	1.752 (44.5)
0.428 (10.9)	0.312 (7.9)	1.752 (44.5)
0.552 (14.0)	0.375 (9.5)	1.726 (43.8)
0.615 (15.6)	0.500 (12.7)	1.866 (47.4)
0.740 (18.8)	0.625 (15.9)	1.866 (47.4)
0.740 (18.8)	0.625 (15.9)	2.040 (51.8)
0.928 (23.6)	0.750 (19.1)	2.040 (51.8)
0.990 (25.1)	0.800 (20.3)	2.178 (55.3)

All dimensions in inches (millimeters in parenthesis)