



STRAIGHT PLUG STYLES

62GB16P





62GB16J

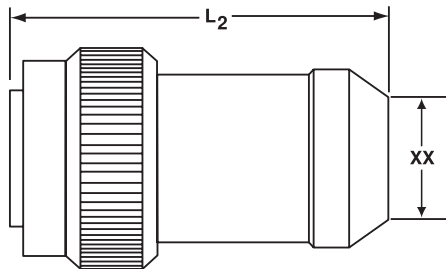

62GB16P		62GB16J		
F	L_1	L_2	CABLE OD	
			XX MIN.	XX MAX.
0.260 (6.6)	1.306 (33.2)	1.836 (46.6)	0.168 (4.3)	0.230 (5.8)
0.463 (11.8)	1.415 (35.9)	1.836 (46.6)	0.205 (5.2)	0.312 (7.9)
0.557 (14.1)	1.384 (35.2)	1.937 (49.2)	0.338 (8.6)	0.442 (11.2)
0.590 (15.0)	1.384 (35.2)	2.137 (54.3)	0.416 (10.6)	0.539 (13.7)
0.713 (18.1)	1.384 (35.2)	2.337 (59.4)	0.550 (14.0)	0.616 (15.6)
0.835 (21.2)	1.384 (35.2)	2.537 (64.4)	0.600 (15.2)	0.672 (17.1)
1.015 (25.8)	1.539 (39.1)	2.758 (70.1)	0.635 (16.1)	0.747 (19.0)
1.015 (25.8)	1.539 (39.1)	2.958 (75.1)	0.670 (17.0)	0.846 (21.5)
1.265 (32.1)	1.602 (40.7)	3.002 (76.3)	0.740 (18.8)	0.894 (22.7)

PANEL CUTOUT/THICKNESS

62GB12E
62GB50T
62GB10

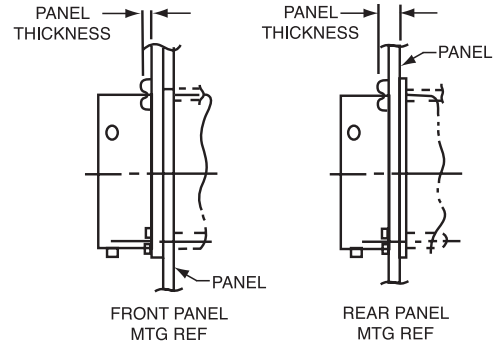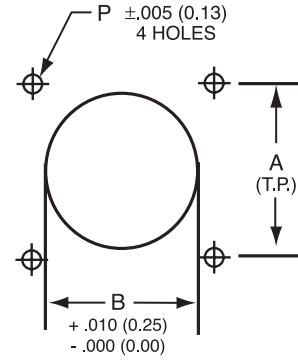

SHELL SIZE	B FRONT MOUNT	A	P $\pm .005$	SCREW SIZE	PANEL THICKNESS
8	0.449 (11.4)	0.594 (15.1)	0.125 (3.2)	#4	0.087 (2.2)
10	0.573 (14.6)	0.719 (18.3)	0.125 (3.2)	#4	0.087 (2.2)
12	0.699 (17.8)	0.812 (20.6)	0.125 (3.2)	#4	0.087 (2.2)
14	0.823 (20.9)	0.906 (23.0)	0.125 (3.2)	#4	0.087 (2.2)
16	0.949 (24.1)	0.969 (24.6)	0.125 (3.2)	#4	0.087 (2.2)
18	1.073 (27.3)	1.062 (27.0)	0.125 (3.2)	#4	0.087 (2.2)
20	1.199 (30.5)	1.156 (29.4)	0.125 (3.2)	#4	0.212 (5.4)
22	1.323 (33.6)	1.250 (31.8)	0.125 (3.2)	#4	0.212 (5.4)
24	1.449 (36.8)	1.375 (34.9)	0.155 (3.9)	#6	0.212 (5.4)

All dimensions in inches (millimeters in parenthesis)