



## PLUG STYLES (BARREL ASSEMBLIES)

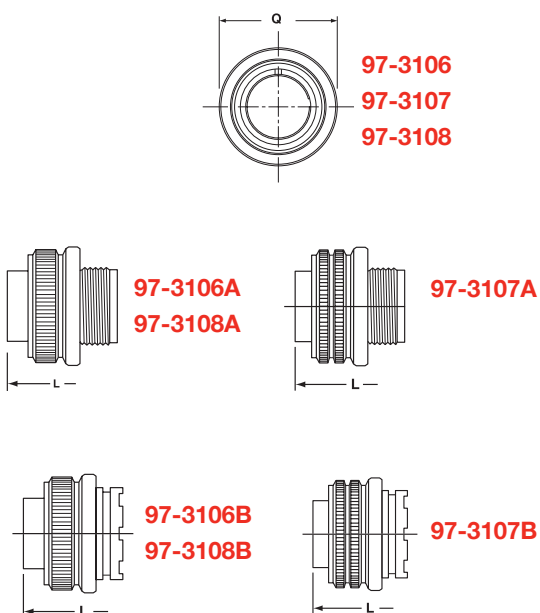

## ENDBELL STYLES

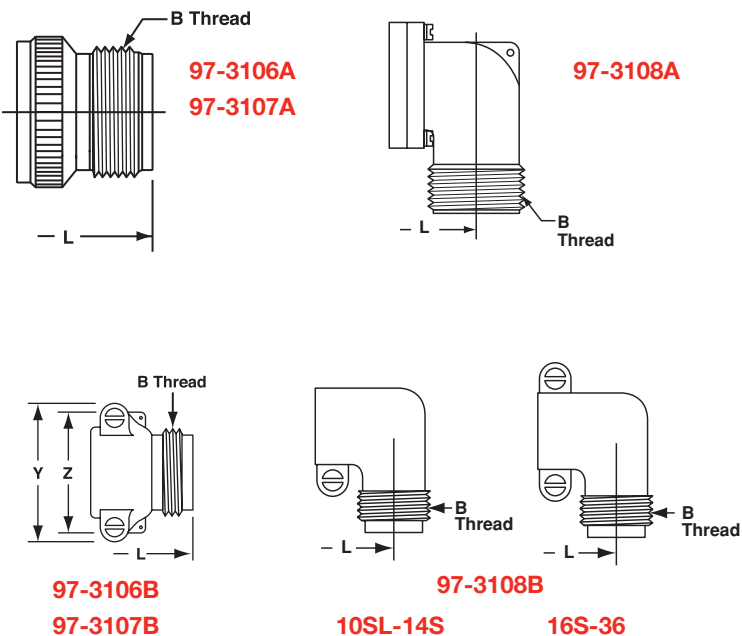

| SHELL<br>SIZE | 97-3106<br>97-3107<br>97-3108 |
|---------------|-------------------------------|
|               | Q                             |
| 8S            | 0.75<br>(19.1)                |
| 10S           | 0.88<br>(22.2)                |
| 10SL          | 0.88<br>(22.2)                |
| 12S           | 1.00<br>(25.4)                |
| 12            | 1.00<br>(25.4)                |
| 12SL          | 1.00<br>(25.4)                |
| 14S           | 1.13<br>(28.6)                |
| 16S           | 1.25<br>(31.8)                |
| 16            | 1.25<br>(31.8)                |
| 18            | 1.34<br>(34.1)                |
| 20            | 1.47<br>(37.3)                |
| 22            | 1.59<br>(40.5)                |
| 24            | 1.72<br>(43.7)                |
| 28            | 1.97<br>(50.0)                |
| 32            | 2.22<br>(56.4)                |
| 36            | 2.47<br>(62.7)                |

| 97-3106A<br>97-3107A | 97-3106B/97-3107B |                |                | 97-3108A       | 97-3108B       |
|----------------------|-------------------|----------------|----------------|----------------|----------------|
| L                    | L                 | Y              | Z              | L              | L              |
| 1.25<br>(31.8)       | -<br>-            | -<br>-         | -<br>-         | -<br>-         | -<br>-         |
| 1.31<br>(33.3)       | -<br>-            | -<br>-         | -<br>-         | 1.25<br>(31.8) | 1.38<br>(34.9) |
| 1.38<br>(35.1)       | -<br>-            | -<br>-         | -<br>-         | 1.31<br>(33.3) | 1.50<br>(38.1) |
| 1.47<br>(37.3)       | -<br>-            | -<br>-         | -<br>-         | 1.38<br>(34.9) | 1.56<br>(39.7) |
| 1.84<br>(46.8)       | -<br>-            | -<br>-         | -<br>-         | 1.22<br>(31.0) | 1.88<br>(47.6) |
| -<br>-               | -<br>-            | -<br>-         | -<br>-         | 1.38<br>(34.9) | -<br>-         |
| 1.47<br>(37.3)       | 1.69<br>(42.9)    | 1.16<br>(29.4) | 1.13<br>(28.6) | 1.22<br>(31.0) | 1.72<br>(43.7) |
| 1.47<br>(37.3)       | 1.69<br>(42.9)    | 1.25<br>(31.8) | 1.25<br>(31.8) | 1.50<br>(38.1) | 1.75<br>(44.5) |
| 1.89<br>(48.0)       | -<br>-            | -<br>-         | -<br>-         | 1.94<br>(49.2) | 2.13<br>(54.0) |
| 1.98<br>(50.4)       | 2.19<br>(55.6)    | 1.64<br>(41.7) | 1.34<br>(34.1) | 1.94<br>(49.2) | 2.16<br>(54.8) |
| 1.89<br>(48.0)       | 2.13<br>(54.0)    | 1.81<br>(46.0) | 1.47<br>(37.3) | 2.06<br>(52.4) | 2.38<br>(60.3) |
| 1.98<br>(50.3)       | 2.13<br>(54.0)    | 1.94<br>(49.2) | 1.59<br>(40.5) | 2.06<br>(52.4) | 2.41<br>(61.1) |
| 2.25<br>(57.2)       | 2.28<br>(57.9)    | 2.06<br>(52.4) | 1.72<br>(43.7) | 2.47<br>(62.7) | 2.63<br>(66.7) |
| 2.25<br>(57.2)       | 2.28<br>(57.9)    | 2.31<br>(58.8) | 1.97<br>(50.0) | 2.47<br>(62.7) | 2.63<br>(66.7) |
| 2.38<br>(60.3)       | 2.31<br>(58.8)    | 2.59<br>(65.9) | 2.22<br>(56.4) | -<br>-         | 2.81<br>(71.4) |
| 2.38<br>(60.3)       | 2.34<br>(59.5)    | 2.84<br>(72.2) | 2.47<br>(62.7) | -<br>-         | 2.84<br>(72.2) |

| B Thread 2A    |
|----------------|
| .5000-28 UNEF  |
| .5000-28 UNEF  |
| .6250-24 UNEF  |
| .6250-24 UNEF  |
| .6250-24 UNEF  |
| .7500-20 UNEF  |
| .7500-20 UNEF  |
| .8750-20 UNEF  |
| .8750-20 UNEF  |
| 1.0000-20 UNEF |
| 1.1875-18 UNEF |
| 1.1875-18 UNEF |
| 1.4375-18 UNEF |
| 1.4375-18 UNEF |
| 1.7500-18 UNS  |
| 2.0000-18 UNS  |

All dimensions in inches (millimeters in parenthesis)