



STRAIGHT PLUGS


**KPT06
KPSE06
MS3116
MS3126
KP__05**

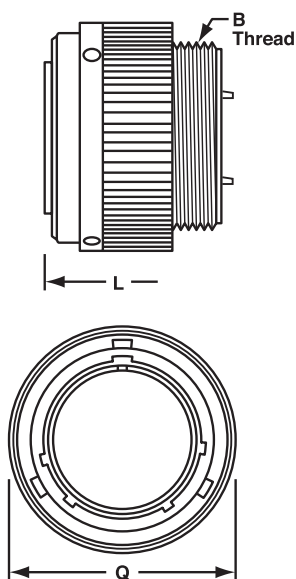


**KPT06A
KPSE06A**



**KPT06E
KPSE06E
MS3116E
MS3126E**



**KPT06F
KPSE06F
MS3116F
MS3126F**




SHELL SIZE	06			06A			06E		06F		
	Q MAX.	L MAX.	B THREAD 2A	F MIN.	L MAX.	B THREAD UNEF-2A	L MAX.	KK MAX.	F MAX.	G MIN.	L MAX.
8	.782	0.841 (21.4)	.4375-28 UNEF	0.335 (8.5)	1.440 (36.6)	.5000-28	1.328 (33.7)	0.608 (15.4)	0.828 (21.0)	0.115 (2.9)	1.906 (48.4)
10	.926	0.841 (21.4)	.5625-24 UNEF	0.466 (11.8)	1.440 (36.6)	.6250-24	1.328 (33.7)	0.734 (18.6)	0.891 (22.6)	0.178 (4.5)	1.906 (48.4)
12	1.043	0.841 (21.4)	.6875-24 UNEF	0.591 (15.0)	1.440 (36.6)	.7500-20	1.328 (33.7)	0.858 (21.8)	1.016 (25.8)	0.302 (7.7)	1.906 (48.4)
14	1.183	0.841 (21.4)	.8125-20 UNEF	0.705 (17.9)	1.440 (36.6)	.8750-20	1.328 (33.7)	0.984 (25.0)	1.141 (29.0)	0.365 (9.3)	1.906 (48.4)
16	1.305	0.841 (21.4)	.9375-20 UNEF	0.830 (21.1)	1.440 (36.6)	1.0000-20	1.328 (33.7)	1.110 (28.2)	1.203 (30.6)	0.490 (12.4)	2.047 (52.0)
18	1.391	0.841 (21.4)	1.0625-18 UNEF	0.948 (24.1)	1.662 (42.2)	1.1875-18	1.328 (33.7)	1.234 (31.3)	1.469 (37.3)	0.615 (15.6)	2.078 (52.8)
20	1.531	0.986 (25.0)	1.1875-18 UNEF	1.043 (26.5)	1.662 (42.2)	1.1875-18	1.453 (36.9)	1.360 (34.5)	1.469 (37.3)	0.615 (15.6)	2.250 (57.2)
22	1.656	0.986 (25.0)	1.3125-18 UNEF	1.198 (30.4)	1.662 (42.2)	1.4375-18	1.453 (36.9)	1.484 (37.7)	1.656 (42.1)	0.740 (18.8)	2.250 (57.2)
24	1.770	0.986 (25.0)	1.4375-18 UNEF	1.293 (32.8)	1.672 (42.5)	1.4375-18	1.510 (38.4)	1.610 (40.9)	1.750 (44.5)	0.790 (20.1)	2.312 (58.7)

All dimensions in inches (millimeters in parentheses) unless otherwise stated.

STRAIGHT PLUGS

KPT06J
KPSE06J
MS3116J

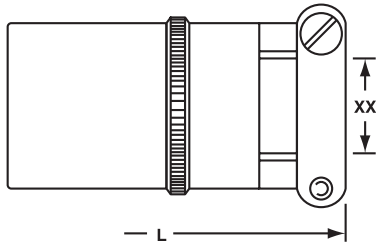

06P	
J	L MIN.
0.317 (8.1)	1.500 (38.1)
0.434 (11.0)	1.500 (38.1)
0.548 (13.9)	1.500 (38.1)
0.673 (17.1)	1.500 (38.1)
0.798 (20.3)	1.500 (38.1)
0.899 (22.8)	1.500 (38.1)
1.024 (26.0)	1.609 (40.9)
1.149 (29.2)	1.609 (40.9)
1.274 (32.4)	1.687 (42.8)


KPT06J
KPSE06J
MS3116J



06J		
L	CABLE Q0	
	XX MIN.	XX MAX.
2.271 (57.7)	0.168 (4.3)	0.230 (5.8)
2.271 (57.7)	0.205 (5.2)	0.312 (7.9)
2.411 (61.2)	0.338 (8.6)	0.442 (11.2)
2.599 (66.0)	0.416 (10.6)	0.539 (13.7)
2.943 (74.8)	0.550 (14.0)	0.616 (15.6)
3.172 (80.6)	0.600 (15.2)	0.672 (17.1)
3.610 (91.7)	0.635 (16.1)	0.747 (19.0)
3.766 (95.7)	0.670 (17.0)	0.846 (21.5)
3.985 (101.2)	0.740 (18.8)	0.849 (21.6)

RIGHT ANGLE PLUGS

KPT08A, B, E, F
KPSE08A, B, E, F



08 STYLE	WITH CLAMP	WITH WIRE SEAL
A		
B	●	
E		●
F	●	●



SHELL SIZE	08E/A/B/F		
	Q MAX.	F MAX.	L MAX.
8	0.765 (19.4)	0.812 (20.6)	1.842 (46.8)
10†	0.840 (21.3)	0.875 (22.2)	1.937 (49.2)
12	0.999 (25.4)	1.062 (27.0)	1.937 (49.2)
14	1.139 (28.9)	1.156 (29.4)	2.124 (53.9)
16	1.261 (32.0)	1.250 (31.8)	2.203 (56.0)
18	1.337 (34.0)	1.469 (37.3)	2.380 (60.5)
20	1.477 (37.5)	1.469 (37.3)	2.629 (66.8)
22	1.602 (40.7)	1.680 (42.7)	2.629 (66.8)
24†	1.723 (43.8)	1.688 (42.9)	2.895 (73.5)

➡ See page 330 for epoxy potting compound.

† A 2-piece backshell maybe used, contact us for details

All dimensions in inches (millimeters in parentheses) unless otherwise stated.

KPT08P
KPSE08P



08P	
F MAX.	L MIN.
-	-
0.252 (6.4)	1.380 (35.1)
0.252 (6.4)	1.567 (39.8)
0.283 (7.2)	1.567 (39.8)
0.355 (9.0)	1.567 (39.8)
0.530 (13.5)	1.755 (44.6)
0.562 (14.3)	1.782 (45.3)
0.562 (14.3)	1.782 (45.3)
0.610 (15.5)	2.087 (53.0)