


Straight Plugs





KPT06
KPSE06
MS3116
MS3126
KP_05



KPT06A
KPSE06A

KPT06E
KPSE06E
MS3116E
MS3126E

KPT06F
KPSE06F
MS3116F
MS3126F



06			
SHELL SIZE	Q MAX.	L MAX.	B THREAD 2A
8	0.765 (19.4)	0.841 (21.4)	.4375-28 UNEF
10	0.840 (21.3)	0.841 (21.4)	.5625-24 UNEF
12	0.999 (25.4)	0.841 (21.4)	.6875-24 UNEF
14	1.139 (28.9)	0.841 (21.4)	.8125-20 UNEF
16	1.261 (32.0)	0.841 (21.4)	.9375-20 UNEF
18	1.337 (34.0)	0.841 (21.4)	1.0625-18 UNEF
20	1.477 (37.5)	0.986 (25.0)	1.1875-18 UNEF
22	1.602 (40.7)	0.986 (25.0)	1.3125-18 UNEF
24	1.723 (43.8)	0.986 (25.0)	1.4375-18 UNEF


06A		
F MIN.	L MAX.	B THREAD UNEF-2A
0.335 (8.5)	1.440 (36.6)	.5000-28
0.466 (11.8)	1.440 (36.6)	.6250-24
0.591 (15.0)	1.440 (36.6)	.7500-20
0.705 (17.9)	1.440 (36.6)	.8750-20
0.830 (21.1)	1.440 (36.6)	1.0000-20
0.948 (24.1)	1.662 (42.2)	1.1875-18
1.043 (26.5)	1.662 (42.2)	1.1875-18
1.198 (30.4)	1.662 (42.2)	1.4375-18
1.293 (32.8)	1.672 (42.5)	1.4375-18

06E	
L MAX.	KK MAX.
1.328 (33.7)	0.608 (15.4)
1.328 (33.7)	0.734 (18.6)
1.328 (33.7)	0.858 (21.8)
1.328 (33.7)	0.984 (25.0)
1.328 (33.7)	1.110 (28.2)
1.328 (33.7)	1.234 (31.3)
1.453 (36.9)	1.360 (34.5)
1.453 (36.9)	1.484 (37.7)
1.510 (38.4)	1.610 (40.9)


06F		
F MAX	G MIN	L MAX
0.828 (21.0)	0.115 (2.9)	1.906 (48.4)
0.891 (22.6)	0.178 (4.5)	1.906 (48.4)
1.016 (25.8)	0.302 (7.7)	1.906 (48.4)
1.141 (29.0)	0.365 (9.3)	1.906 (48.4)
1.203 (30.6)	0.490 (12.4)	2.047 (52.0)
1.469 (37.3)	0.615 (15.6)	2.078 (52.8)
1.469 (37.3)	0.615 (15.6)	2.250 (57.2)
1.656 (42.1)	0.740 (18.8)	2.250 (57.2)
1.750 (44.5)	0.790 (20.1)	2.312 (58.7)

Straight Plugs

KPT06J
KPSE06J
MS3116J

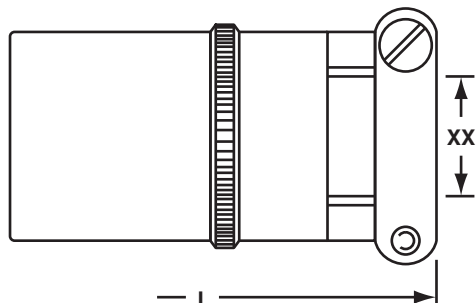

KPT06P*
KPSE06P*
MS3116P*
MS3126P*



06P	
F	L MIN.
0.317 (8.1)	1.500 (38.1)
0.434 (11.0)	1.500 (38.1)
0.548 (13.9)	1.500 (38.1)
0.673 (17.1)	1.500 (38.1)
0.798 (20.3)	1.500 (38.1)
0.899 (22.8)	1.500 (38.1)
1.024 (26.0)	1.609 (40.9)
1.149 (29.2)	1.609 (40.9)
1.274 (32.4)	1.687 (42.8)


06J		
L	CABLE QO	
	XX MIN.	XX MAX.
2.271 (57.7)	0.168 (4.3)	0.230 (5.8)
2.271 (57.7)	0.205 (5.2)	0.312 (7.9)
2.411 (61.2)	0.338 (8.6)	0.442 (11.2)
2.599 (66.0)	0.416 (10.6)	0.539 (13.7)
2.943 (74.8)	0.550 (14.0)	0.616 (15.6)
3.172 (80.6)	0.600 (15.2)	0.672 (17.1)
3.610 (91.7)	0.635 (16.1)	0.747 (19.0)
3.766 (95.7)	0.670 (17.0)	0.846 (21.5)
3.985 (101.2)	0.740 (18.8)	0.849 (21.6)

➔ *See **page 262**
for epoxy potting
compound.

Right Angle Plugs

KPT08A, B, E, F
KPSE08A, B, E, F

KPT08P
KPSE08P

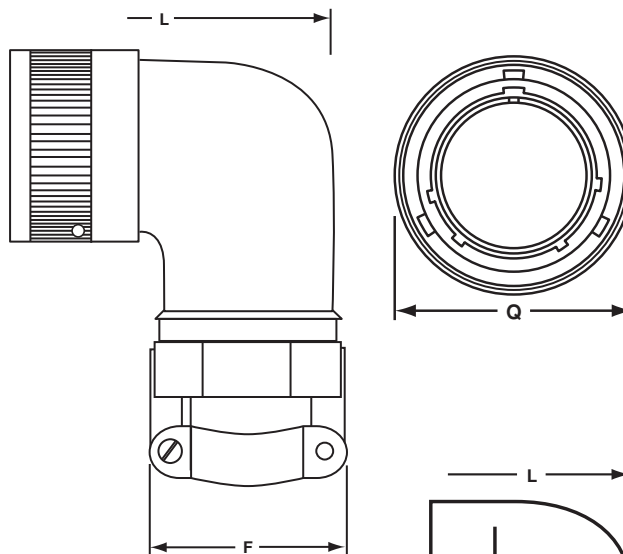

08 STYLE	WITH CLAMP	WITH WIRE SEAL & FERRULE
A		
B	●	
E		●
F	●	●

08E/A/B/F			
SHELL SIZE	Q MAX.	F MAX.	L MAX.
8	0.765 (19.4)	0.812 (20.6)	1.842 (46.8)
10†	0.840 (21.3)	0.875 (22.2)	1.937 (49.2)
12	0.999 (25.4)	1.062 (27.0)	1.937 (49.2)
14	1.139 (28.9)	1.156 (29.4)	2.124 (53.9)
16	1.261 (32.0)	1.250 (31.8)	2.203 (56.0)
18	1.337 (34.0)	1.469 (37.3)	2.380 (60.5)
20	1.477 (37.5)	1.469 (37.3)	2.629 (66.8)
22	1.602 (40.7)	1.680 (42.7)	2.629 (66.8)
24†	1.723 (43.8)	1.688 (42.9)	2.895 (73.5)

08P	
F MAX.	L MIN.
-	-
0.252 (6.4)	1.380 (35.1)
0.252 (6.4)	1.567 (39.8)
0.283 (7.2)	1.567 (39.8)
0.355 (9.0)	1.567 (39.8)
0.530 (13.5)	1.755 (44.6)
0.562 (14.3)	1.782 (45.3)
0.562 (14.3)	1.782 (45.3)
0.610 (15.5)	2.087 (53.0)

† A 2-piece backshell maybe used, call for details