

KPT/KPSE Dimensions









Receptacle Styles

KPT00
KPSE00
MS3110
MS3120
KP_03

KPT01
KPSE01
MS3111
MS3121
KP_04

KPT02
KPSE02
MS3112
MS3122


KPTB
MS3119




	ALL TYPES	00/02/B				01		00/01		02		B
SHELL SIZE	N DIA. +.003 (+/-0.1)	R (TP)	S MAX.	T DIA.	P1	P2	Q MAX.	L1 MAX.	B THREAD CLASS 2A	L2 MAX.	KK DIA. MAX.	L3 MAX.
8	0.471 (12.0)	0.594 (15.1)	0.828 (21.0)	0.120 (3.0)	0.062 (1.6)	0.094 (2.4)	0.958 (24.3)	0.850 (21.6)	.4375-28 UNEF	0.791 (20.1)	0.469 (11.9)	1.125 (38.6)
10	0.588 (14.9)	0.719 (18.3)	0.954 (24.2)	0.120 (3.0)	0.062 (1.6)	0.094 (2.4)	1.082 (27.5)	0.850 (21.6)	.5625-24 UNEF	0.791 (20.1)	0.593 (15.1)	1.125 (38.6)
12	0.748 (19.0)	0.812 (20.6)	1.047 (26.6)	0.120 (3.0)	0.062 (1.6)	0.094 (2.4)	1.176 (29.9)	0.850 (21.6)	.6875-24 UNEF	0.791 (20.1)	0.719 (18.3)	1.125 (38.6)
14	0.873 (22.2)	0.906 (23.0)	1.141 (29.0)	0.120 (3.0)	0.062 (1.6)	0.094 (2.4)	1.270 (32.3)	0.850 (21.6)	.8125-20 UNEF	0.791 (20.1)	0.843 (21.4)	1.125 (38.6)
16	0.998 (25.3)	0.969 (24.6)	1.234 (31.3)	0.120 (3.0)	0.062 (1.6)	0.094 (2.4)	1.364 (34.6)	0.850 (21.6)	.9375-20 UNEF	0.791 (20.1)	0.969 (24.6)	1.125 (38.6)
18	1.123 (28.5)	1.062 (27.0)	1.328 (33.7)	0.120 (3.0)	0.062 (1.6)	0.094 (2.4)	1.458 (37.0)	0.850 (21.6)	1.0625-18 UNEF	0.791 (20.1)	1.093 (27.8)	1.125 (38.6)
20	1.248 (31.7)	1.156 (29.4)	1.453 (36.9)	0.120 (3.0)	0.094 (2.4)	0.115 (2.9)	1.582 (40.2)	1.057 (26.8)	1.1875-18 UNEF	0.891 (22.6)	1.219 (31.0)	1.406 (35.7)
22	1.373 (34.9)	1.250 (31.8)	1.578 (40.1)	0.120 (3.0)	0.094 (2.4)	0.115 (2.9)	1.708 (43.4)	1.057 (26.8)	1.3125-18 UNEF	0.891 (22.6)	1.343 (34.1)	1.406 (35.7)
24	1.498 (38.0)	1.375 (34.9)	1.703 (43.3)	0.147 (3.7)	0.094 (2.4)	0.115 (2.9)	1.832 (46.5)	1.057 (26.8)	1.4375-18 UNEF	0.891 (22.6)	1.469 (37.3)	1.406 (35.7)

Endbell Styles


A (Not MS)




E (MS)




**F (MS)
B (Not MS)**



P (MS)



J (MS)

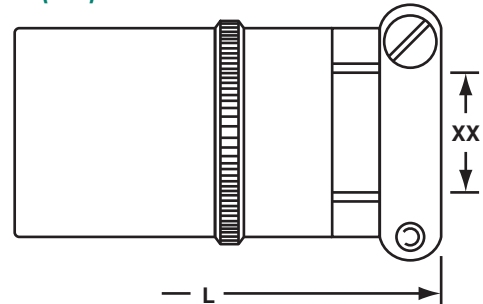

A ENDBELL		
F MIN.	L MAX.	B THREAD UNEF-2A
0.335 (8.5)	1.444 (36.7)	.5000-28
0.466 (11.8)	1.444 (36.7)	.6250-24
0.591 (15.0)	1.444 (36.7)	.7500-20
0.705 (17.9)	1.444 (36.7)	.8750-20
0.830 (21.1)	1.444 (36.7)	1.0000-20
0.948 (24.1)	1.444 (36.7)	1.1875-18
1.043 (26.5)	1.728 (43.9)	1.1875-18
1.198 (30.4)	1.728 (43.9)	1.4375-18
1.293 (32.8)	1.738 (44.1)	1.4375-18

E ENDBELL	
L MAX.	KK MAX.
1.328 (33.7)	0.608 (15.4)
1.328 (33.7)	0.734 (18.6)
1.328 (33.7)	0.858 (21.8)
1.328 (33.7)	0.984 (25.0)
1.328 (33.7)	1.110 (28.2)
1.328 (33.7)	1.234 (31.3)
1.531 (38.9)	1.360 (34.5)
1.531 (38.9)	1.484 (37.7)
1.594 (40.5)	1.610 (40.9)

F/B ENDBELL		
F MIN.	G MIN.	L
0.828 (21.0)	0.115 (2.9)	1.922 (48.8)
0.891 (22.6)	0.178 (4.5)	1.922 (48.8)
1.016 (25.8)	0.302 (7.7)	1.922 (48.8)
1.141 (29.0)	0.365 (9.3)	1.922 (48.8)
1.203 (30.6)	0.490 (12.4)	2.047 (52.0)
1.469 (37.3)	0.615 (15.6)	2.078 (52.8)
1.469 (37.3)	0.615 (15.6)	2.344 (59.5)
1.656 (42.1)	0.740 (18.8)	2.344 (59.5)
1.750 (44.5)	0.790 (20.1)	2.406 (61.1)

P ENDBELL	
F	L MAX.
0.317 (8.1)	1.453 (36.9)
0.434 (11.0)	1.453 (36.9)
0.548 (13.9)	1.453 (36.9)
0.673 (17.1)	1.453 (36.9)
0.798 (20.3)	1.453 (36.9)
0.899 (22.8)	1.453 (36.9)
1.024 (26.0)	1.672 (42.5)
1.149 (29.2)	1.672 (42.5)
1.274 (32.4)	1.734 (44.0)

J ENDBELL		
L	XX MIN.	XX MAX.
2.271 (57.7)	0.168 (4.3)	0.230 (5.8)
2.271 (57.7)	0.205 (5.2)	0.312 (7.9)
2.411 (61.2)	0.338 (8.6)	0.442 (11.2)
2.599 (66.0)	0.416 (10.6)	0.539 (13.7)
2.943 (74.8)	0.550 (14.0)	0.616 (15.6)
3.172 (80.6)	0.600 (15.2)	0.672 (17.1)
3.610 (91.7)	0.635 (16.1)	0.747 (19.0)
3.766 (95.7)	0.670 (17.0)	0.846 (21.5)
3.985 (101.2)	0.740 (18.8)	0.894 (22.7)