


Straight Plug

CA3106E-B designates a straight plug with endbell, cable clamp and telescoping bushing

VG95234 Style D resp. CA3106E-B and Modifications

Modifications see page 10

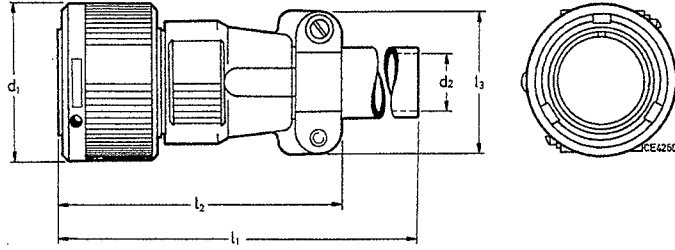

Dimensions in mm

VG95234 Part No.	Cannon Part No.	$d_1$ max	$d_2^{2)}$ max	$l_1$ max	$l_2$ max	$l_3$ max	$l_4$ max	Weight <sup>1)</sup> g max
VG95234D-10SL-*	CA3106E10SL-**-***	22,80	6,50	115,00	55,00	22,70	22,70	30
-	CA3106E12S-**-***	26,00	6,50	115,00	55,00	22,70	22,70	37
VG95234D-14S-*	CA3106E14S-**-***	29,20	9,00	115,00	60,00	27,50	27,50	44
VG95234D-16S-*	CA3106E16S-**-***	32,00	11,00	115,00	60,00	30,00	30,00	54
VG95234D-16-*	CA3106E16-**-***	32,00	11,00	120,00	70,00	30,00	30,00	62
VG95234D-18-*	CA3106E18-**-***	36,50	14,20	120,00	75,00	33,00	33,00	70
VG95234D-20-*	CA3106E20-**-***	39,90	15,80	120,00	75,00	37,50	37,50	85
VG95234D-22-*	CA3106E22-**-***	43,10	15,80	120,00	75,00	37,50	37,50	92
VG95234D-24-*	CA3106E24-**-***	46,60	21,40	120,00	90,00	43,30	43,30	127
VG95234D-28-*	CA3106E28-**-***	53,40	21,40	120,00	90,00	48,00	43,30	154
VG95234D-32-*	CA3106E32-**-***	60,10	26,70	120,00	90,00	55,00	51,70	199
VG95234D-36-*	CA3106E36-**-***	66,30	31,70	130,00	100,00	58,00	58,00	260

Dimensions in inches

VG95234 Part No.	Cannon Part No.	$d_1$ max	$d_2^{2)}$ max	$l_1$ max	$l_2$ max	$l_3$ max	$l_4$ max	Weight <sup>1)</sup> g max
VG95234D-10SL-*	CA3106E10SL-**-***	.898	.256	4.528	2.165	.894	.894	30
-	CA3106E12S-**-***	1.024	.256	4.528	2.165	.894	.894	37
VG95234D-14S-*	CA3106E14S-**-***	1.150	.354	4.528	2.362	1.083	1.083	44
VG95234D-16S-*	CA3106E16S-**-***	1.260	.433	4.528	2.362	1.181	1.181	54
VG95234D-16-*	CA3106E16-**-***	1.260	.433	4.724	2.756	1.181	1.181	62
VG95234D-18-*	CA3106E18-**-***	1.437	.559	4.724	2.953	1.299	1.299	70
VG95234D-20-*	CA3106E20-**-***	1.571	.622	4.724	2.953	1.476	1.476	85
VG95234D-22-*	CA3106E22-**-***	1.697	.622	4.724	2.953	1.476	1.476	92
VG95234D-24-*	CA3106E24-**-***	1.835	.843	4.724	3.543	1.705	1.705	127
VG95234D-28-*	CA3106E28-**-***	2.102	.843	4.724	3.543	1.890	1.705	154
VG95234D-32-*	CA3106E32-**-***	2.366	1.051	4.724	3.543	2.165	2.035	199
VG95234D-36-*	CA3106E36-**-***	2.610	1.248	5.118	3.937	2.283	2.283	260

<sup>1)</sup> Weight without insulator, grommets and contacts.

<sup>2)</sup> For max. cable entry.