


Straight Plug

VG95234 Style F

CA3101E-B designates a cable connection plug with cable clamp and a telescoping bushing

CA3101E-B and Modifications

Modifications see page 10

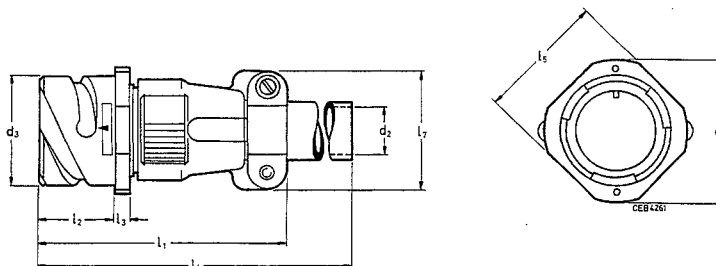

Dimensions in mm

VG95234 Part No.	Cannon Part No.	d ₁ max	d ₂ ²⁾	d ₃ -0,15	l ₁ max	l ₂ ±0,1	l ₃ ±0,2	l ₄ max	l ₅ ±0,2	l ₇ max	Weight ¹⁾ g max
VG95234F-10SL-*	CA3101E10SL-**-***	25,20	6,50	18,20	57,00	16,60	2,80	120,00	20,60	22,70	35
-	CA3101E12S-**-***	27,80	6,50	21,40	57,00	16,60	3,20	120,00	23,60	22,70	43
VG95234F-14S-*	CA3101E14S-**-***	29,80	9,00	24,60	59,00	16,60	3,20	120,00	25,40	27,50	50
VG95234F-16S-*	CA3101E16S-**-***	32,30	11,00	27,40	60,00	16,60	3,20	120,00	28,60	30,00	60
VG95234F-16-*	CA3101E16-**-***	32,30	11,00	27,40	68,00	23,90	3,20	125,00	28,60	30,00	65
VG95234F-18-*	CA3101E18-**-***	34,80	14,20	30,80	72,00	23,90	4,00	125,00	31,70	33,00	80
VG95234F-20-*	CA3101E20-**-***	37,80	15,80	34,20	72,00	23,90	4,00	125,00	34,90	37,50	95
VG95234F-22-*	CA3101E22-**-***	41,10	15,80	37,40	72,00	23,90	4,00	125,00	38,10	37,50	105
VG95234F-24-*	CA3101E24-**-***	44,60	21,40	40,90	78,00	23,90	4,00	125,00	41,30	43,30	140
VG95234F-28-*	CA3101E28-**-***	50,90	21,40	46,70	79,00	23,90	4,00	125,00	47,60	43,30	160
VG95234F-32-*	CA3101E32-**-***	57,10	26,70	53,40	78,00	23,90	4,00	125,00	54,00	51,70	205
VG95234F-36*-*	CA3101E36*-**-***	63,60	31,70	59,60	78,00	23,90	4,00	135,00	60,60	58,00	270

Dimensions in inches

VG95234 Part No.	Cannon Part No.	d ₁ max	d ₂ ²⁾	d ₃ -.006	l ₁ max	l ₂ ±.004	l ₃ ±.008	l ₄ max	l ₅ ±.008	l ₇ max	Weight ¹⁾ g max
VG95234F-10SL-*	CA3101E10SL-**-***	.992	.256	.717	2.244	.654	.110	4.724	.811	.894	35
-	CA3101E12S-**-***	1.094	.256	.843	2.244	.654	.126	4.724	.929	.894	43
VG95234F-14S-*	CA3101E14S-**-***	1.173	.354	.969	2.323	.654	.126	4.724	1.000	1.083	50
VG95234F-16S-*	CA3101E16S-**-***	1.272	.433	1.080	2.362	.654	.126	4.724	1.126	1.181	60
VG95234F-16-*	CA3101E16-**-***	1.272	.433	1.080	2.677	.941	.126	4.921	1.126	1.181	65
VG95234F-18-*	CA3101E18-**-***	1.370	.559	1.213	2.835	.941	.157	4.921	1.248	1.299	80
VG95234F-20-*	CA3101E20-**-***	1.488	.622	1.346	2.835	.941	.157	4.921	1.374	1.476	95
VG95234F-22-*	CA3101E22-**-***	1.681	.622	1.472	2.835	.941	.157	4.921	1.500	1.476	105
VG95234F-24-*	CA3101E24-**-***	1.756	.843	1.610	3.071	.941	.157	4.921	1.626	1.705	140
VG95234F-28-*	CA3101E28-**-***	2.004	.843	1.839	3.110	.941	.157	4.921	1.874	1.705	160
VG95234F-32-*	CA3101E32-**-***	2.248	1.051	2.102	3.071	.941	.157	4.921	2.126	2.035	205
VG95234F-36*-*	CA3101E36*-**-***	2.504	1.248	2.346	3.071	.941	.157	5.315	2.386	2.283	270

¹⁾ Weight without insulator, grommets and contacts.

²⁾ For contact insert 36-5P a support washer is included.

³⁾ For max. cable entry.