

Wall Mounting Receptacle


For rear mounting

VG95234 Style J₁ (with threaded holes in flange)
VG95234 Style J₂ (with through holes in flange)

CA3100E-B and Modifications e g -05 (with through holes)

CA3100E-B designates a wall mounting receptacle with cable clamp and telescoping bushing

CA3100E-B and Modifications e g -01, F80 (for ordered contacts)

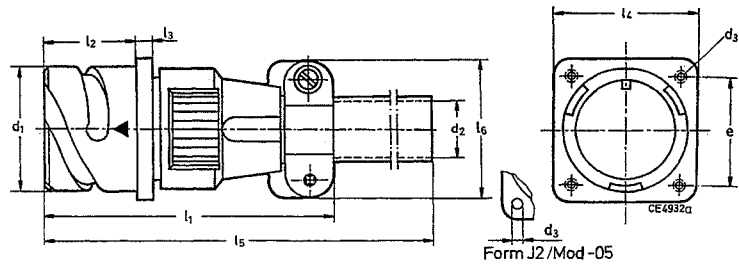

Dimensions in mm

VG95234 Part No.	Canon Part No.	d ₁ -0,15	d ₂ *	d ₃		e ±0,1	l ₁ max	l ₂ +0,4	l ₃ ±0,2	l ₅ max	l ₄ ±0,3
				J1	J2						
VG95234*XX-10SL-*	CA3100E10SL**-B-***	18,20	6,50	M4	3,20	18,20	57,00	18,20	2,80	25,40	120
-	CA3100E12S**-B-***	21,40	6,50	M4	3,20	20,60	57,00	18,20	3,20	28,00	120
VG95234*XX-14S-*	CA3100E14S**-B-***	24,60	9,00	M4	3,20	23,00	59,00	18,20	3,20	30,00	120
VG95234*XX-16S-*	CA3100E16S**-B-***	27,40	11,00	M4	3,20	24,60	60,00	18,20	3,20	32,50	120
VG95234*XX-16-*	CA3100E16**-B-***	27,40	11,00	M4	3,20	24,60	68,00	21,50	3,20	32,50	125
VG95234*XX-18-*	CA3100E18**-B-***	30,80	14,20	M4	3,20	27,00	72,00	23,05	4,00	35,00	125
VG95234*XX-20-*	CA3100E20**-B-***	34,20	15,80	M4	3,20	29,40	72,00	23,05	4,00	38,00	125
VG95234*XX-22-*	CA3100E22**-B-***	37,40	15,80	M4	3,20	31,80	72,00	23,05	4,00	41,00	125
VG95234*XX-24-*	CA3100E24**-B-***	40,90	21,40	M4	3,70	34,90	78,00	23,05	4,00	44,50	125
VG95234*XX-28-*	CA3100E28**-B-***	46,70	21,40	M5	3,70	39,70	79,00	24,05	4,00	50,80	125
VG95234*XX-32-*	CA3100E32**-B-***	53,40	26,70	M5	4,30	44,50	78,00	24,05	4,00	57,00	125
VG95234*XX-36-*	CA3100E36**-B-***	59,60	31,70	M5	4,30	49,20	78,00	24,05	4,00	63,50	135

Dimensions in inches

VG95234 Part No.	Canon Part No.	d ₁ -006	d ₂ *	d ₃		e ±.004	l ₁ max	l ₂ +.016	l ₃ ±.008	l ₅ max	l ₄ ±.012
				J1	J2						
VG95234*XX-10SL-*	CA3100E10SL**-B-***	.717	.256	M4	.126	.717	2.244	.717	.110	4.724	1.000
-	CA3100E12S**-B-***	.843	.256	M4	.126	.811	2.244	.717	.126	4.724	1.102
VG95234*XX-14S-*	CA3100E14S**-B-***	.969	.354	M4	.126	.906	2.323	.717	.126	4.724	1.181
VG95234*XX-16S-*	CA3100E16S**-B-***	1.079	.433	M4	.126	.969	2.362	.717	.126	4.724	1.280
VG95234*XX-16-*	CA3100E16**-B-***	1.079	.433	M4	.126	.969	2.677	.846	.126	4.921	1.280
VG95234*XX-18-*	CA3100E18**-B-***	1.213	.559	M4	.126	1.063	2.835	.907	.157	4.921	1.378
VG95234*XX-20-*	CA3100E20**-B-***	1.346	.622	M4	.126	1.157	2.835	.907	.157	4.921	1.496
VG95234*XX-22-*	CA3100E22**-B-***	1.472	.622	M4	.126	1.252	2.835	.907	.157	4.921	1.614
VG95234*XX-24-*	CA3100E24**-B-***	1.610	.843	M4	.146	1.374	3.071	.907	.157	4.921	1.752
VG95234*XX-28-*	CA3100E28**-B-***	1.839	.843	M5	.146	1.563	3.110	.947	.157	4.921	2.000
VG95234*XX-32-*	CA3100E32**-B-***	2.102	1.051	M5	.169	1.752	3.071	.947	.157	4.921	2.244
VG95234*XX-36-*	CA3100E36**-B-***	2.346	1.248	M5	.169	1.937	3.071	.947	.157	5.315	2.500

* Weight without insulator, grommets and contacts.

* For max. cable entry.