


Plug 90° Shielded

VG95234 Style K

CA3108F-B-13, -14 or -15 designates a shielded plug with 90° endbell for flex tube

CA3108F and Modifications

Modifications see page 10

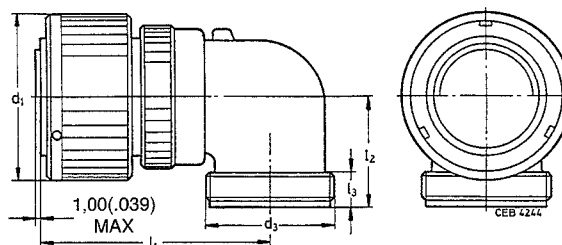

Dimensions in mm

VG96234 Part No.	Cannon Part No.	d ₃ -Thread	d ₁ max	l ₁ max	l ₂ max	l ₃ min	Weight ¹⁾ g max
—	CA3108F10SL-**-B-***	5/8-24UNEF-2A	22,80	45,00	22,00	9,40	27
VG95234K-12S-*	CA3108F12S-**-B-***	5/8-27UNEF-2A	26,00	45,00	22,00	9,40	35
VG95234K-14S-*	CA3108F14S-**-B-***	3/4-20UNEF-2A	29,20	47,00	24,00	9,40	43
VG95234K-16S-*	CA3108F16S-**-B-***	7/8-20UNEF-2A	32,00	48,00	25,00	9,40	48
VG95234K-16-*	CA3108F16-**-B-***	7/8-20UNEF-2A	32,00	57,00	25,00	9,40	58
VG95234K-18-*	CA3108F18-**-B-***	1-20UNEF-2A	36,50	58,00	27,00	9,40	58
VG95234K-20-*	CA3108F20-**-B-***	1-3/16-18NEF-2A	39,90	61,00	29,00	9,40	74
VG95234K-22-*	CA3108F22-**-B-***	1-3/16-18NEF-2A	43,10	61,00	30,00	9,40	78
VG95234K-24-*	CA3108F24-**-B-***	1-7/16-18NEF-2A	46,60	66,00	32,00	9,40	104
VG95234K-28-*	CA3108F28-**-B-***	1-7/16-18NEF-2A	53,40	66,00	34,00	9,40	126
VG95234K-32-*	CA3108F32-**-B-***	1-3/4-18NS-2A	60,10	72,00	39,50	11,00	160
VG95234K-36-*	CA3108F36-**-B-***	2-18NS-2A	66,30	75,00	45,00	12,60	190

Dimensions in inches

VG96234 Part No.	Cannon Part No.	d ₃ -Thread	d ₁ max	l ₁ max	l ₂ max	l ₃ min	Weight ¹⁾ g max
—	CA3108F10SL-**-B-***	5/8-24UNEF-2A	.898	1.772	.866	.370	27
VG95234K-12S-*	CA3108F12S-**-B-***	5/8-27UNEF-2A	1.024	1.772	.866	.370	35
VG95234K-14S-*	CA3108F14S-**-B-***	3/4-20UNEF-2A	1.150	1.850	.945	.370	43
VG95234K-16S-*	CA3108F16S-**-B-***	7/8-20UNEF-2A	1.260	1.890	.984	.370	48
VG95234K-16-*	CA3108F16-**-B-***	7/8-20UNEF-2A	1.260	2.244	.984	.370	58
VG95234K-18-*	CA3108F18-**-B-***	1-20UNEF-2A	1.437	2.283	1.629	.370	58
VG95234K-20-*	CA3108F20-**-B-***	1-3/16-18NEF-2A	1.453	2.402	1.142	.370	74
VG95234K-22-*	CA3108F22-**-B-***	1-3/16-18NEF-2A	1.697	2.402	1.181	.370	78
VG95234K-24-*	CA3108F24-**-B-***	1-7/16-18NEF-2A	1.835	2.598	1.260	.370	104
VG95234K-28-*	CA3108F28-**-B-***	1-7/16-18NEF-2A	2.102	2.598	1.338	.370	126
VG95234K-32-*	CA3108F32-**-B-***	1-3/4-18NS-2A	2.366	2.835	1.555	.433	160
VG95234K-36-*	CA3108F36-**-B-***	2-18NS-2A	2.610	2.953	1.772	.496	190

¹⁾ Weight without insulator, grommets and contacts.