


Straight Plug, Shielded

VG95234 Style L

CA3106F-B-13, -14 or -15 designates a straight plug with endbell for flex tube

CA3106F-B and Modifications

Modifications see page 10

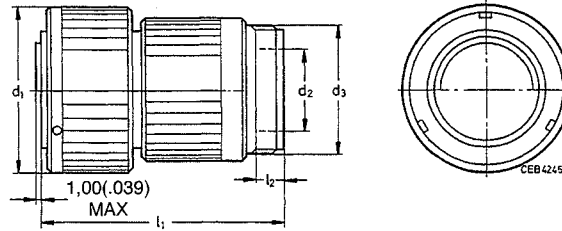

Dimensions in mm

VG95234 Part No.	Cannon Part No.	d ₂ -Thread	d ₁	d ₂ ²⁾ max	l ₁	l ₂ min	Weight ¹⁾ g max
VG95234L-10SL-*	CA3106F10SL-**-B-***	5/8-24UNEF-2A	22,80	8,20	50,00	9,50	21
VG95234L-12S-*	CA3106F12S-**-B-***	5/8-24UNEF-2A	26,00	8,20	50,00	9,50	29
VG95234L-14S-*	CA3106F14S-**-B-***	3/4-20UNEF-2A	29,20	11,10	50,00	9,50	33
VG95234L-16S-*	CA3106F16S-**-B-***	7/8-20UNEF-2A	32,00	14,30	50,00	9,50	42
VG95234L-16-*	CA3106F-16-**-B-***	7/8-20UNEF-2A	32,00	14,30	60,00	9,50	51
VG95234L-18-*	CA3106F-18-**-B-***	1-20UNEF-2A	36,50	16,70	60,00	9,50	59
VG95234L-20-*	CA3106F-20-**-B-***	1-3/16-18NEF-2A	39,90	19,80	60,00	9,50	58
VG95234L-22-*	CA3106F-22-**-B-***	1-3/16-18NEF-2A	43,10	19,80	60,00	9,50	62
VG95234L-24-*	CA3106F-24-**-B-***	1-7/16-18NEF-2A	46,60	25,40	65,00	9,50	84
VG95234L-28-*	CA3106F-28-**-B-***	1-7/16-18NEF-2A	53,40	27,00	65,00	9,50	100
VG95234L-32-*	CA3106F-32-**-B-***	1-3/4-18NS-2A	60,10	32,50	65,00	11,00	116
VG95234L-36-*	CA3106F-36-**-B-***	2-18NS-2A	66,30	35,70	80,00	11,80	142

Dimensions in inches

VG95234 Part No.	Cannon Part No.	d ₂ -Thread	d ₁	d ₂ ²⁾ max	l ₁	l ₂ min	Weight ¹⁾ g max
VG95234L-10SL-*	CA3106F10SL-**-B-***	5/8-24UNEF-2A	.898	.323	1.969	.374	21
VG95234L-12S-*	CA3106F12S-**-B-***	5/8-24UNEF-2A	1.024	.323	1.969	.374	29
VG95234L-14S-*	CA3106F14S-**-B-***	3/4-20UNEF-2A	1.150	.437	1.969	.374	33
VG95234L-16S-*	CA3106F16S-**-B-***	7/8-20UNEF-2A	1.260	.563	1.969	.374	42
VG95234L-16-*	CA3106F-16-**-B-***	7/8-20UNEF-2A	1.260	.563	2.362	.374	51
VG95234L-18-*	CA3106F-18-**-B-***	1-20UNEF-2A	1.437	.657	2.362	.374	59
VG95234L-20-*	CA3106F-20-**-B-***	1-3/16-18NEF-2A	1.453	.780	2.362	.374	58
VG95234L-22-*	CA3106F-22-**-B-***	1-3/16-18NEF-2A	1.697	.780	2.362	.374	62
VG95234L-24-*	CA3106F-24-**-B-***	1-7/16-18NEF-2A	1.835	1.000	2.559	.374	84
VG95234L-28-*	CA3106F-28-**-B-***	1-7/16-18NEF-2A	2.102	1.063	2.559	.374	100
VG95234L-32-*	CA3106F-32-**-B-***	1-3/4-18NS-2A	2.366	1.280	2.559	.433	116
VG95234L-36-*	CA3106F-36-**-B-***	2-18NS-2A	2.610	1.406	3.150	.465	142

¹⁾ Weight without insulator, grommets and contacts.

²⁾ For max. cable entry.