


Straight Plug, Shielded

VG95234 Style M

CA3106E-B-13, -14 or -15 designates a straight, shielded plug with endbell for shielded braids, and heat shrinkable boots

CA3106E-B and Modifications

Modifications see page 10

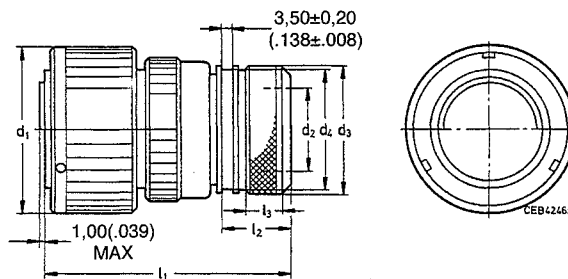

Dimensions in mm

VG95234 Part No.	Cannon Part No.	d ₁ max	d ₂ ²⁾ min	d ₃ ±0,5	d ₄ max	l ₁ max	l ₂ +1	l ₃ ±0,5	Weight ¹⁾ g max
VG95234M-10SL-*	CA3106E10SL-**-B-***	22,80	7,70	18,50	16,30	55,00	17,00	7,00	40
-	CA3106E12S-**-B-***	26,00	9,30	20,00	17,00	55,00	17,00	7,00	42
VG95234M-14S-*	CA3106E14S-**-B-***	29,20	10,60	22,00	20,00	55,00	17,00	7,00	45
VG95234M-16S-*	CA3106E16S-**-B-***	32,00	13,50	25,00	23,00	60,00	18,00	8,00	55
VG95234M-16-*	CA3106E16-**-B-***	32,00	13,50	25,00	23,00	70,00	18,00	8,00	65
VG95234M-18-*	CA3106E18-**-B-***	36,50	14,60	28,00	24,50	70,00	18,00	8,00	75
VG95234M-20-*	CA3106E20-**-B-***	39,90	18,50	32,00	28,50	70,00	18,00	10,00	85
VG95234M-22-*	CA3106E22-**-B-***	43,10	20,80	34,00	30,50	70,00	18,00	10,00	100
VG95234M-24-*	CA3106E24-**-B-***	46,60	24,60	38,00	34,50	70,00	18,00	10,00	115
VG95234M-28-*	CA3106E28-**-B-***	53,40	27,00	41,00	37,50	70,00	18,00	10,00	130
VG95234M-32-*	CA3106E32-**-B-***	60,10	33,30	48,00	44,00	70,00	18,00	10,00	170
VG95234M-36-*	CA3106E36-**-B-***	66,30	38,50	55,00	51,00	80,00	18,00	10,00	190

Dimensions in inches

VG95234 Part No.	Cannon Part No.	d ₁ max	d ₂ ²⁾ min	d ₃ ±.020	d ₄ max	l ₁ max	l ₂ +.039	l ₃ ±.020	Weight ¹⁾ g max
VG95234M-10SL-*	CA3106E10SL-**-B-***	.898	.303	.728	.642	2.165	.669	.276	40
-	CA3106E12S-**-B-***	1.024	.366	.787	.669	2.165	.669	.276	42
VG95234M-14S-*	CA3106E14S-**-B-***	1.150	.417	.866	.787	2.165	.669	.276	45
VG95234M-16S-*	CA3106E16S-**-B-***	1.260	.531	.984	.906	2.362	.709	.315	55
VG95234M-16-*	CA3106E16-**-B-***	1.260	.531	.984	.906	2.756	.709	.315	65
VG95234M-18-*	CA3106E18-**-B-***	1.437	.575	1.102	.965	2.756	.709	.315	75
VG95234M-20-*	CA3106E20-**-B-***	1.571	.728	1.260	1.122	2.756	.709	.394	85
VG95234M-22-*	CA3106E22-**-B-***	1.697	.819	1.339	1.301	2.756	.709	.394	100
VG95234M-24-*	CA3106E24-**-B-***	1.835	.969	1.496	1.358	2.756	.709	.394	115
VG95234M-28-*	CA3106E28-**-B-***	2.102	1.063	1.614	1.476	2.756	.709	.394	130
VG95234M-32-*	CA3106E32-**-B-***	2.366	1.311	1.890	1.732	2.756	.709	.394	170
VG95234M-36-*	CA3106E36-**-B-***	2.610	1.516	2.165	2.008	3.150	.709	.394	190

¹⁾ Weight without insulator, grommets and contacts.

²⁾ For max. cable entry.