



CN1020 Series (C48 Family) Vibration-Proof Plug Connector

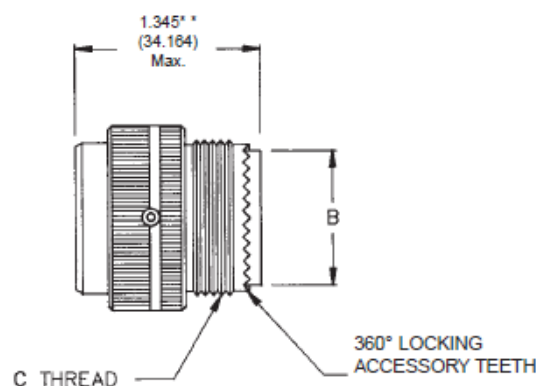

Bayonet Coupling
CN1020-XXXXXXX
BACC63CB¹



Dimensions

Shell Size	A ± .005 (.127)		B Max. Dia.		C Thread UNEF-2A
	in	mm	in	mm	
8	.765	19.447	.306	7.773	.500-20
10	.967	24.561	.371	9.423	.625-24
12	1.078	27.381	.547	13.894	.750-20
14	1.187	30.149	.613	15.570	.875-20
16	1.309	33.248	.758	19.253	1.000-20
18	1.375	34.925	.865	21.971	1.0625-18
20	1.505	38.227	.986	25.044	1.1875-18
22	1.625	41.275	1.106	28.092	1.3125-18
24	1.755	44.577	1.235	31.369	1.4375-18
28	2.161	54.889	1.485	37.719	1.750-18*

Ordering Information²

CN1020 A 10 G 05 P N - 000					
<u>Series Designation</u> CN1020	<u>Series Modification</u> A - Standard Plug	<u>Shell Size</u> 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28	<u>Environmental Class</u> A - Anodized Aluminum G - Cadmium/Nickel-Plated Aluminum	<u>Contact Style</u> P - Pin S - Socket	<u>Order Code (Deviations)¹</u> 000 - Less Contacts 100 - * See below 200 - With Gold-Plated Contacts
				<u>Alternate Shell Positions</u> N, 6, 7, 8, 9, 10 Per table on page 3-4.	<u>Insert Arrangements</u> (See page 3-4)

Notes:

¹ For Boeing Specification, see page 3-14.

² For modification, classes, etc., not listed, consult factory.

* Th'd: UNS-2A

** Size 28 = 1.395 (35.434)

* Former order code - 100 designated rhodium plated contacts