



3-Way Outlet Shapes, VG style

Helashrink 300 Series


- Cable strain relief and mechanical protection at harness transition points
- All outlets clearly marked to aid orientation during installation




For Material / Adhesive selection and other information please refer to page 10.



304-1-G supplied / fully recovered.

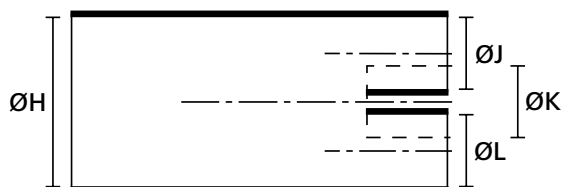

a: Expanded form (supplied)

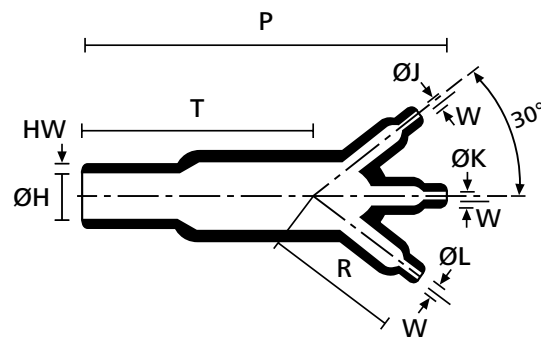

b: Fully recovered form (after heating)

TYPE	Designation as per AS/VG-Norm	ØH min. a	ØH max. b	ØJ/K/L min. a	ØJ/K/L max. b	P ± 10%	R ± 10%	HW ± 20%	W ± 20%	T ± 10%
304-1	AS85049/14210HU	27.0	13.5	13.0	7.0	93.0	50.3	2.5	1.5	42.9
	VG 95343 T08 D 002 A	(1.05")	(.53")	(.51")	(.27")	(3.63")	(1.96")	(.1")	(.06")	(1.67")
306-1	AS85049/14209HU	13.0	6.5	6.5	3.5	46.0	25.4	1.3	1.0	20.3
	VG 95343 T08 D 001 A	(.51")	(.25")	(.25")	(.14")	(1.79")	(.99")	(.05")	(.04")	(.79")
310-1	AS85049/14211HU	38.5	19.0	19.0	10.0	135.0	73.7	3.0	1.8	61.0
	VG 95343 T08 D 003 A	(1.5")	(.74")	(.74")	(.39")	(5.27")	(2.87")	(.12")	(.07")	(2.38")
311-1	AS85049/14212HU	55.5	25.5	27.0	12.5	192.0	103.1	4.6	3.1	88.9
	VG 95343 T08 D 004 A	(2.16")	(.99")	(1.05")	(.49")	(7.49")	(4.02")	(.18")	(.12")	(3.47")

Dimensions in mm, inches in brackets. Subject to technical changes.

Combinations "On request"					
Adhesive	Material				
	B7	G	J	H	L
WM250	•	•	•	•	-
W8	•	•	•	•	-
W24	•	•	•	•	•
W21	-	-	-	•	-
HMT200A	•	•	•	•	-
V9500	•	•	•	•	•
Without Adhesive	•	•	•	•	•

Standard Combinations	
Type	Article Number
304-1-G	403-04180
306-1-G	403-06180
310-1-G	403-10180
311-1-G	403-11180