


a: Expanded form (supplied)

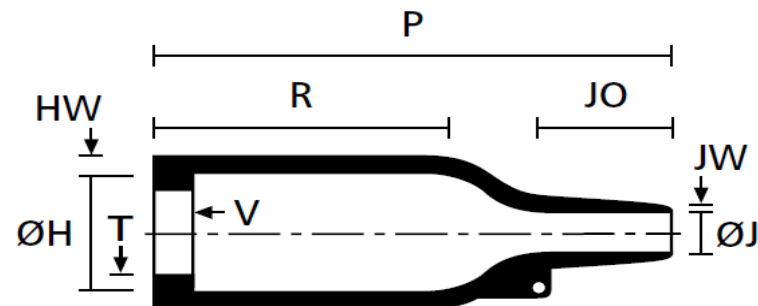

b: Fully recovered form (after heating)

ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P +/-10%	R +/-10%	JO +/-10%	HW +/-20%	JW +/-20%	V +/-10%	T +/-20%
1.18 (30,0)	0.551 (14,0)	1.18 (30,0)	0.236 (6,0)	2.17 (55,0)	1.26 (32,0)	0.512 (13,0)	0.0709 (1,8)	0.0394 (1,0)	0.118 (3,0)	0.0394 (1,0)

inches
(mm)

Material Fluid resistant elastomer
Adhesive EVA high performance hot melt
RoHS Yes

Rev B

Customer Use	
Date Created	8/1/2019
Created By	Mark Baptista
BSB2	

*not to scale