



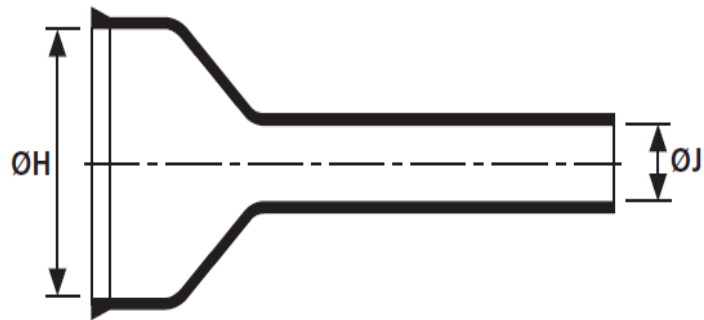

*a: Expanded form (supplied)*

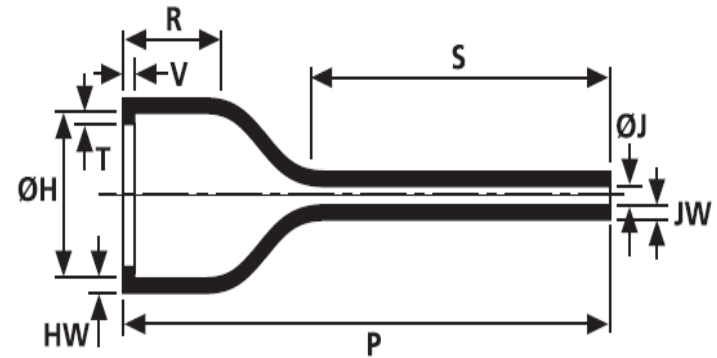

*b: Fully recovered form (after heating)*

| ØH<br>min. a   | ØH<br>max. b   | ØJ<br>min. a   | ØJ<br>max. b   | P<br>+/-10%    | R<br>+/-10%     | T<br>+/-20%     | HW<br>+/-20%    | JW<br>nom       | V<br>max       | S<br>nom       |
|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|
| 1.35<br>(34,2) | 1.02<br>(26,0) | 0.378<br>(9,6) | 0.122<br>(3,1) | 3.31<br>(84,0) | 0.480<br>(12,2) | 0.0394<br>(1,0) | 0.0709<br>(1,8) | 0.0433<br>(1,1) | 0.130<br>(3,3) | 2.01<br>(51,0) |

inches  
(mm)

Material Flexible polyolefin  
Adhesive EVA high performance hot melt  
RoHS Yes

| Customer Use                                                                                                            |             |
|-------------------------------------------------------------------------------------------------------------------------|-------------|
| Date Created                                                                                                            | 8/6/2018    |
| Created By                                                                                                              | Ryder Rigby |
|  <b>PEI-Genesis</b><br><b>HSB3</b> |             |

\*not to scale