




a: Expanded form (supplied)

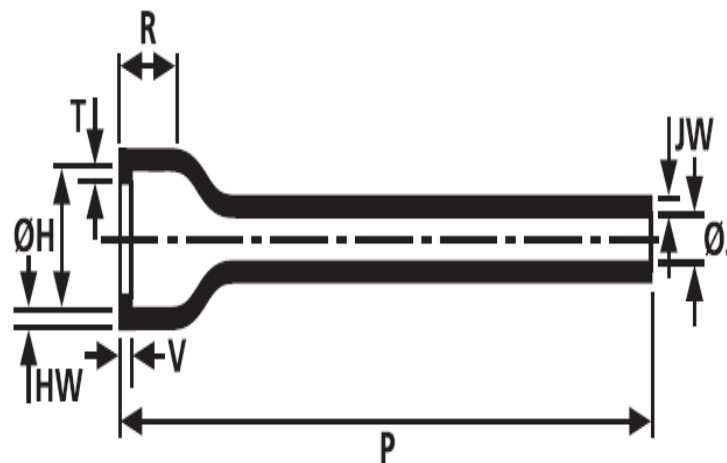

b: Fully recovered form (after heating)

ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P +/-10%	R +/-10%	HW +/-20%	JW +/-20%	V +/-10%	T +/-10%
1.16 (29,4)	0.740 (18,8)	1.16 (29,4)	0.331 (8,4)	5.46 (138,7)	0.480 (12,2)	0.0709 (1,8)	0.0433 (1,1)	0.0394 (1,0)	0.0394 (1,0)

inches
(mm)

Material Flexible polyolefin
 Adhesive EVA high performance hot melt
 RoHS Yes

Customer Use	
Date Created	8/7/2018
Created By	Ryder Rigby
	
SB3-HEL	

*not to scale