




a: Expanded form (supplied)

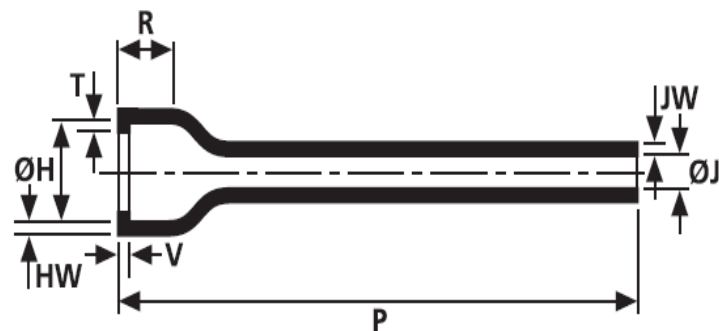

b: Fully recovered form (after heating)

ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P +/-10%	R +/-10%	HW +/-20%	JW +/-20%	V +/-10%	T +/-10%
1.97 (50,0)	1.62 (41,2)	1.97 (50,0)	0.559 (14,2)	8.00 (203,2)	0.598 (15,2)	0.0906 (2,3)	0.0551 (1,4)	0.118 (3,0)	0.0669 (1,7)

inches
(mm)

Material Flexible polyolefin
Adhesive EVA high performance hot melt
RoHS Yes

Customer Use	
Date Created	8/8/2018
Created By	Ryder Rigby
	
SB7-HEL	

*not to scale