




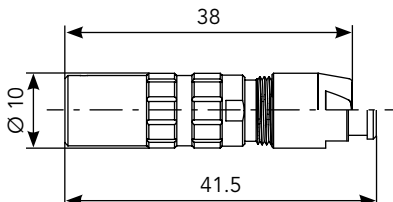



JBX0-08 - IP40 (8 x Ø 0.5mm) - See waterproof IP68 version page 134**Dimensions** (For mated connector lengths see page 137)**Double Nut (EA)****Protruding Front Mount (ED)****Rear Mount (EP)****Front Mount (ER)****In Line Cable Receptacle (PC)***


Standard version






Boot version

PCB Rear Mount with Mounting Pins (EZ)**Right Angle Plug (FC)*****Straight Plug (FD)***





Standard version

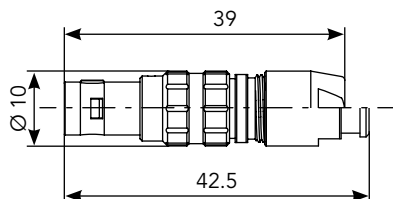


Boot version

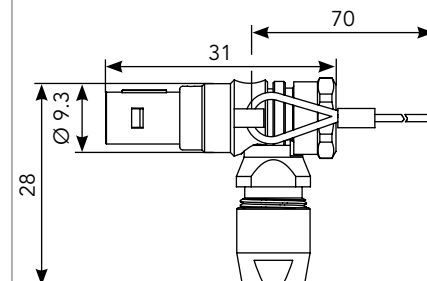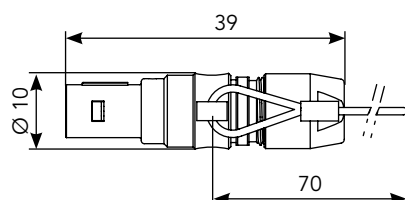Right Angle Plug with Lanyard (FM) ***Straight Plug with Lanyard (FN) *****Panel Cut Out**


Note: all dimensions are in mm

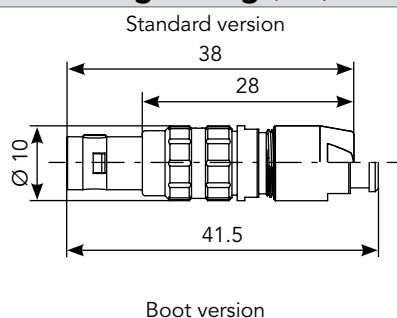JBX0-08 - IP68 (8 x Ø 0.5mm) - See non sealed IP40 version page 132**Dimensions** (For mated connector lengths see page 137)**Double Nut (HC)****Protruding Front Mount (HD)****Front Mount Extended (HH)****Straight Plug (FH)*****Panel Cut Out**

HC Receptacle



HD & HH Receptacle



Note: all dimensions are in mm