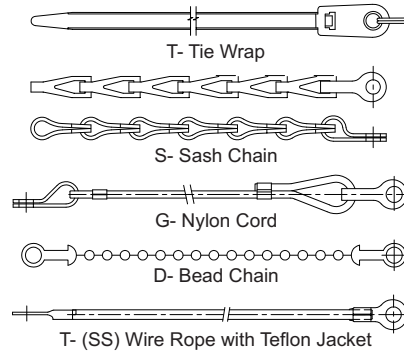
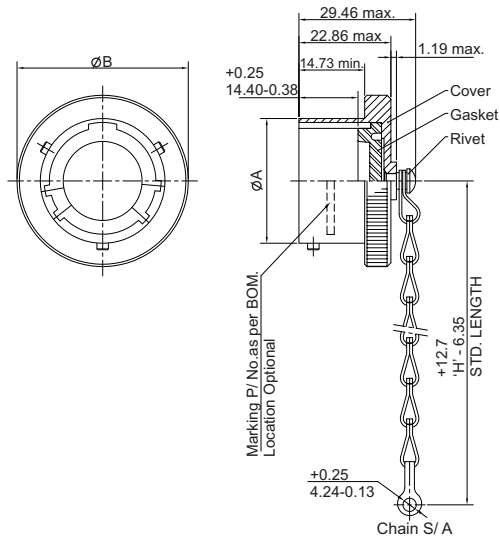


**STYLE 'C'**

All Dimensions are in mm

| Shell Size | Ø 'A' +0.02 -0.13 | Ø 'B' max | H +12.70 -6.35 |
|------------|-------------------|-----------|----------------|
| 09         | 14.53             | 18.29     | 76.20          |
| 11         | 17.78             | 21.59     |                |
| 13         | 21.59             | 25.40     |                |
| 15         | 24.77             | 28.70     | 88.90          |
| 17         | 27.94             | 31.75     |                |
| 19         | 30.66             | 35.05     |                |
| 21         | 33.83             | 38.10     |                |
| 23         | 37.01             | 41.40     | 101.60         |
| 25         | 40.18             | 44.45     |                |

All Dimensions for reference only

**Ordering Information**

JANMS27501 B 11 C L

Designates Plug Dust Cover

Shell Size: 09, 11, 13, 15, 17, 19, 21, 23 &amp; 25

Class:  
 B-Cadmium plate olive drab finish  
 C-Hard Anodize black finish  
 F-Electroless nickel finish

Style: C-With chain  
 A- Without chain

Length  
 L- 127.0 + 12.7/-6.35 chain/Rope in lieu of std. length.  
 Leave blank for std. length. 'H'

Note: For non-standard long 'L' contact factory.

**Ordering Information (Proprietary)**

ILJT27501 09 A D T H

Designates Plug Dust Cover


Shell Size: 09, 11, 13, 15, 17, 19, 21, 23 &amp; 25

Finish:  
 A-Hard anodic non-conductive  
 W-Cadmium plate with olive drab  
 E-Electroless nickel  
 X-Zinc cobalt olive drab  
 Z-Zinc cobalt olive drab

Type of attachment:  
 D-Bead chain passivated  
 G-Nylon cord  
 S-Sash chain  
 T-S.S. wire rope with teflon jacket  
 X- None

Type of end link:  
 T- Tie wrap  
 X- None (Small link hole dia 4.49 mm max.)

Length of attachment:  
 H-Standard length  
 For non-standard 'H' length has to be specified in inches.

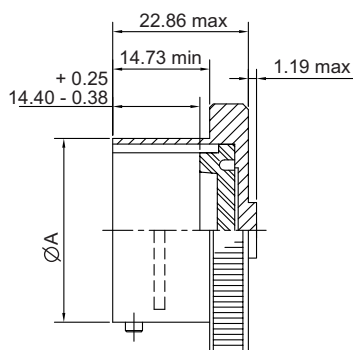**Cap without attachment****Ordering Information**



ILJT27501 08 A V1

Designates Plug Dust Cover

Shell Size: 09, 11, 13, 15, 17, 19, 21, 23 &amp; 25

Class:  
 A-Hard Anodic  
 W-Aluminium, 500 hrs. cadmium olive drab.  
 F-Aluminium, 48 hrs. electroless nickel.  
 T-Nickel PTFE finish.

Variant

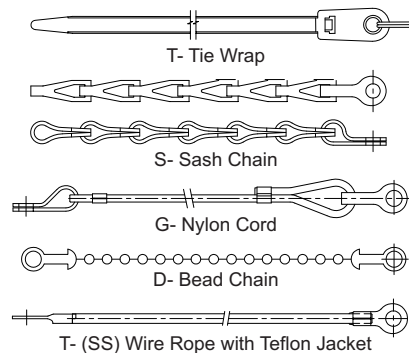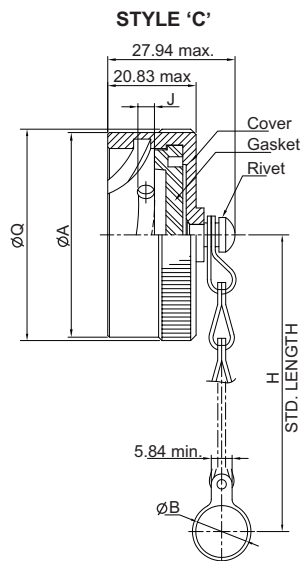


All Dimensions are in mm

| Shell Size | ø 'A' max. | ø'B' min | H<br>+12.70<br>-6.35 | J<br>±0.38    | ø'B' max |
|------------|------------|----------|----------------------|---------------|----------|
| 09         | 19.81      | 17.78    | 76.20                | 2.67          | 21.84    |
| 11         | 22.99      | 21.34    |                      |               | 24.89    |
| 13         | 26.95      | 25.65    |                      |               | 29.46    |
| 15         | 30.12      | 28.96    | 88.90                |               | 32.51    |
| 17         | 33.05      | 32.00    |                      |               | 35.81    |
| 19         | 36.12      | 35.31    |                      |               | 38.61    |
| 21         | 39.22      | 38.35    | 101.60               |               | 41.91    |
| 23         | 42.34      | 41.66    |                      | 44.96         |          |
| 25         | 45.54      | 44.70    |                      | 3.51<br>48.01 |          |


All Dimensions for reference only

### Ordering Information (MIL Part Number)

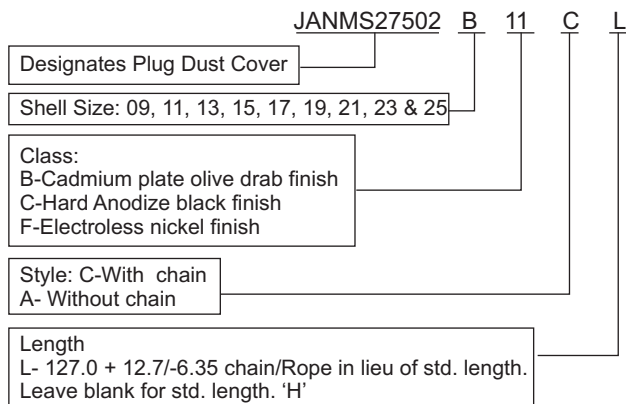


Note: For non-standard long 'L' contact factory.

### Ordering Information (Proprietary Part Number)

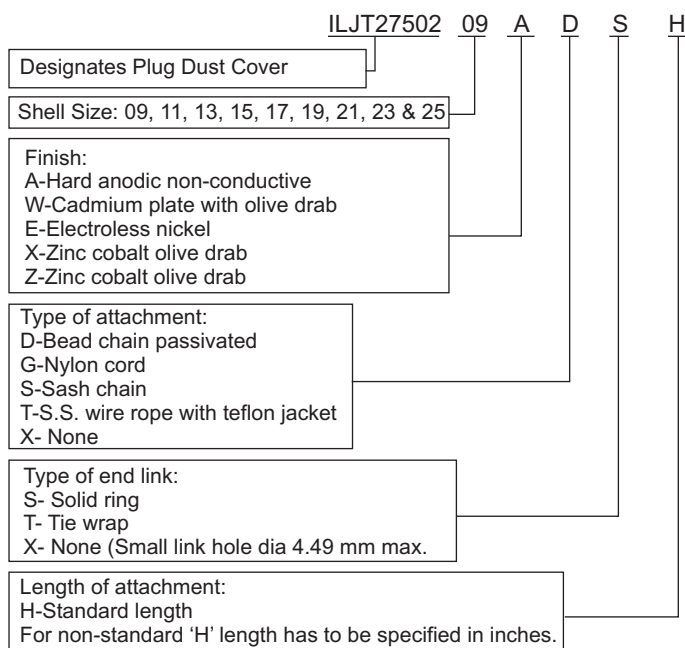

### Cap without attachment

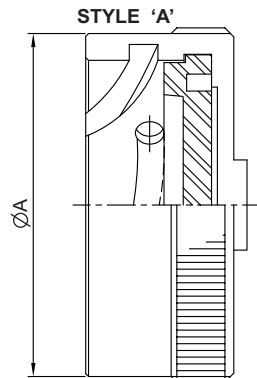

### Ordering Information ILJT27502 09 A V1

