

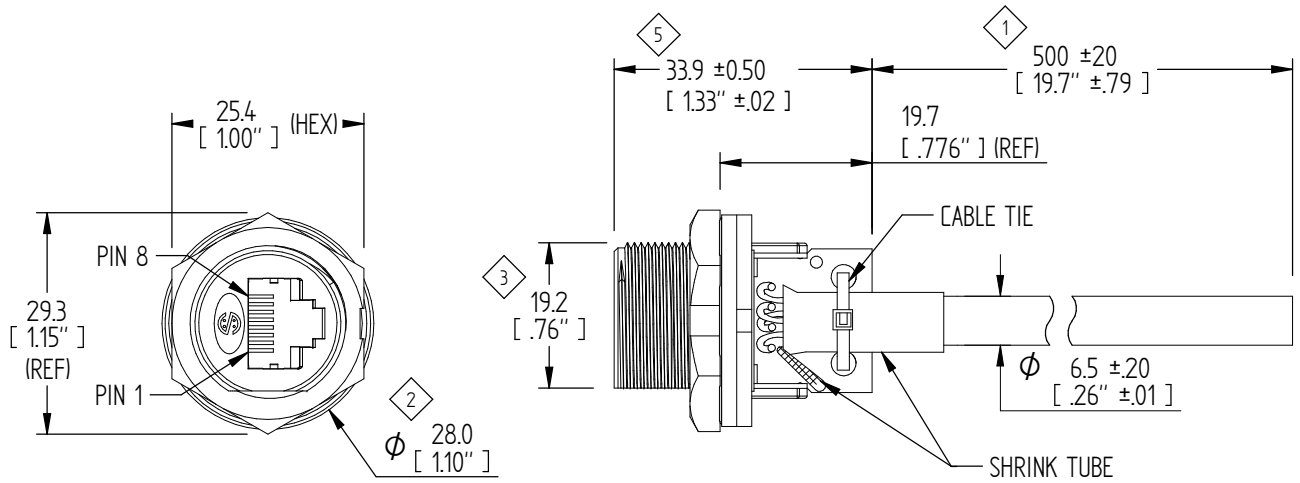


REVISIONS					
REV	ZONE	ECO#	DESCRIPTION	DRAW	APPD
-			INITIAL RELEASE	KC	PK
A			ADDED RoHS NOTE; ADDED CABLE DIA TOLS	KC	PK
					DATE
					11/10/16
					2/15/17

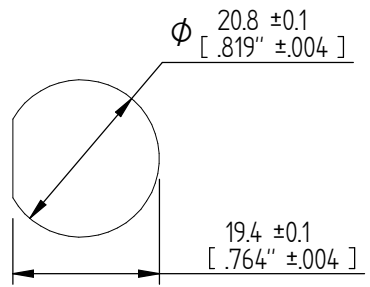


RJ45 JACK

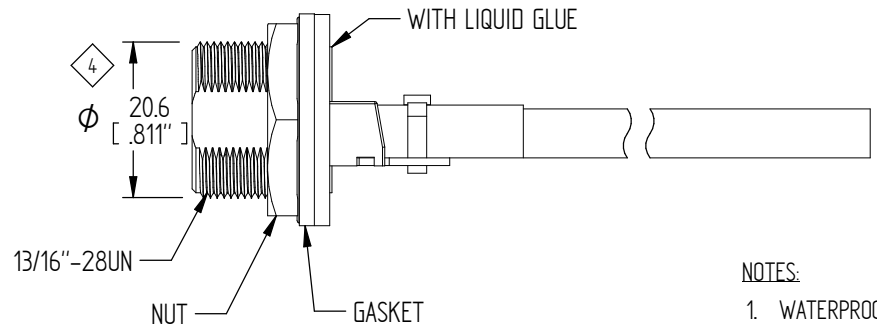

RECOMMENDED PANEL CUT-OUT

SCHEMATIC

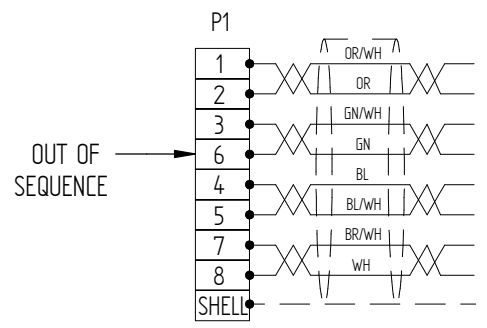

NOTES:

1. WATERPROOF RATE: IP68 (NO INGRESS OF DUST/PROTECTED AGAINST HARMFUL EFFECT CAUSED IN 1 METER WATER WITHIN 24 HOURS)
2. TEMPERATURE RANGE: -40°C TO +85°C
3. MAX PANEL THICKNESS: 4.0mm (WITHOUT CAP CHAIN)
4. MATERIAL: HOUSING: NYLON, BLACK PIN: COPPER ALLOY, GOLD PLATED SCREW NUT: NYLON, BLACK
5. CABLE: CAT.5E FTP 24AWG*4P+MYLAR+DRAIN+ALMYLAR PVC BLACK, UV RESISTANT, OD=Φ6.50mm
6. ITEMS IDENTIFIED WITH DIAMOND (◊...◊) MUST BE INSPECTED.
7. REFERENCE PACKAGING SPECIFICATIONS PER DOC# PKG-001
8. RoHS COMPLIANT.

PART NUMBER		IPMOD-45FSL	
TITLE		JACK, PNL RJ45 WS / PC TL 0.5M	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM		DATE	
TOLERANCE EXCEPT AS NOTED:		11/10/2016	
DECIMAL X ±0.25 XX ±0.1 XXX ±0.05 ANGLES ±°		DATE	
IMPERIAL DIMENSIONS ARE FOR REFERENCE ONLY		11/10/2016	
THIRD ANGLE PROJECTION		DATE	
		11/10/2016	
DRAWN		KCHOD	
ENGINEER		D.KAPLACHINSKI	
APPROVED BY		P.KIM	
SIZE		A	
SCALE		NTS	
SHEET		1 OF 1	
REV		A	

PEI-Genesis

2180 Hornig Road, Philadelphia, PA 19116

NOTICE OF CONFIDENTIALITY:
THIS DRAWING IS THE PROPERTY OF PEI-Genesis. ALL RIGHTS RESERVED. REPRODUCTION BY ANY MEANS OR DISTRIBUTION TO THIRD PARTIES IS STRICTLY PROHIBITED WITHOUT THE WRITTEN PERMISSION OF AN AUTHORIZED AGENT OF PEI-Genesis.