





ATM ATM Series™ SR01

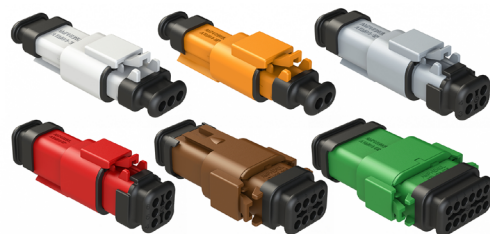



Heavy-Duty, Multi-Pin, 7.5A, Thermoplastic Connectors featuring an Extended Strain Relief

Available in 2, 3, 4, 6, 8 and 12 position

Amphenol Sine Systems' **ATM Series™ SR01** connectors are a high-performance, thermoplastic, cost-effective solution with specifically-designed, wire cavities that protect each individual wire seal, eliminating stress on the rear seal while maintaining an IP68/69K rated (mated) performance regardless of wire bundle direction or improper installation. **The ATM Series™ SR01 meets all the performance criteria and specifications of the ATM Series™**, is available in a wide variety of custom colors, and accepts all **A Series™** Size 20 contacts. Required wedgelock sold separately.



PROTECTS each wire cavity to maximize sealing integrity.

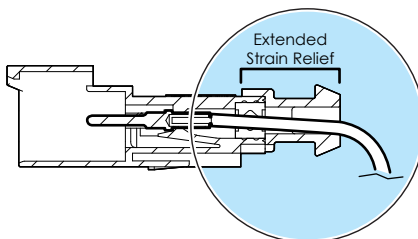

MAINTAINS proper wire routing 100% of the time.




Standard Diameter Rear Seals (Red) -
1.35mm (.053") - 3.05mm (.120")

Applications: Marine, Heavy Equipment, Agricultural, Automotive, Alternative Energy, as well as other demanding interconnect applications

Key Features


- Heat-shrink capable shroud for applications requiring heat shrink (The use of heat shrink is NOT required to meet existing IP standards)
- Enhanced Sealing Plugs for simplified insertion/removal, improved retention capabilities and include a positive 'stop' for full insertion verification
- Thermoplastic housing with excellent UV resistance
- Wedgelocks ensure proper contact alignment & retention
- Integrated latch for mating ensures a secure connection
- Superior front and rear environmental sealing
- Compatible with existing standard products industry-wide



Standard vs SR01



Heat-Shrink Capable Shroud



Enhanced Sealing Plugs



IP Ratings

IP67 rated (Dust tight; 1M of Water for 30 Minutes, in mated condition)
IP68 rated (Dust tight; 1M of Water for 24 Hours, in mated condition)
IP69K rated (Dust tight; High-Pressure Waterproof, 4 Points (0°, 30°, 60°, 90°), in mated condition)



Standard products. Custom solutions
Customer Service +1 800 394 7732

ATM Series™ SR01 - Specifications (See Individual datasheets)


IP Rating (in mated condition)	IP68 and IP69K
Max. Current (Amperage)	7.5A
Max. Voltage Rating	250V
Operating Temperature	-55°C to +125°C
Coupling System	Integrated Latch
Housing Body	Thermoplastic UL94-VO
Contact Types	Stamped & Formed, Machined
Contact Material	Copper Alloy, Nickel Plated (Gold Plating available)
Wire Range	Size 20, 16-22AWG (See individual datasheets)
Sealing Material	Silicone Rubber
Min. Mating Cycles	>100
Flammability Rating	UL94-VO
Fluid Resistance	Gas, oil, mineral oil, acid bath, basic bath

Insulation Resistance	1000 megohms min. of 25°C
Shock	No latch disengagement or discontinuity shall be the result when subjected to 50 g's in each of three axis (X, Y & Z)
Vibration	Continued continuity without degradation to mechanical or physical attributes following vibration. (Max acceleration 20 g's at Sine sweep of 10-2000Hz)
Connector Terminal Retention	When subjected to a direct pull, contacts achieve a minimum pull-out force of 25 lbs.
Connector Retention	A mated connector subjected to a pulling force by the exiting wire bundle at 25 lbs. times the number of contacts to a maximum of 100 lbs. applying load for 30 seconds
Thermal Shock	No cracking, chipping or leaking after 20 test cycles from -55°C to 125°C
RoHS Compliant	ALL materials meet the requirements of the European Directive. (See website for documentation)

Custom Color Options

Black	Grey	Brown	Blue	White	Yellow	Green	Red	Orange
-------	------	-------	------	-------	--------	-------	-----	--------

Part Numbering Sequence (2, 3, 4 and 6 position)

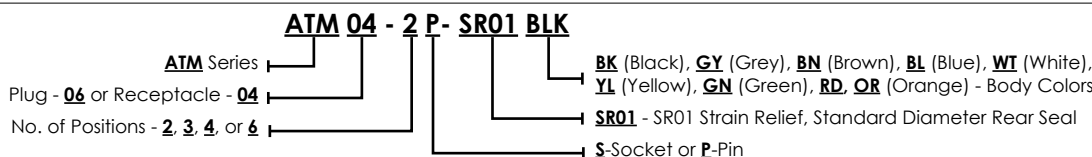

Part Numbering Sequence (08 and 12 position)



ATM Series™ SR01 Plugs and Wedgelocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

Image	Part Number	Description	Size	Amp
	ATM06-2S-SR01BK	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01BL	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01BN	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01GN	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01GY	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01OR	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01RD	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01WT	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01YL	2 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A

Image	Part Number	Description	Size	Amp
	AWM-2S	2 Position, Plug Wedgelock, Orange	-	-
	AWM-2SA	2 Position, Plug Wedgelock, Keyed A, Grey	-	-
	AWM-2SB	2 Position, Plug Wedgelock, Keyed B, Black	-	-

	ATM06-3S-SR01BK	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01BL	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01BN	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01GN	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01GY	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01OR	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01RD	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01WT	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01YL	3 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-3S.)	20	7.5A
	AWM-3S	3 Position, Plug Wedgelock, Orange	-	-

	ATM06-4S-SR01BK	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01BL	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01BN	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01GN	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01GY	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01OR	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01RD	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01WT	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01YL	4 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-4S.)	20	7.5A
	AWM-4S	4 Position, Plug Wedgelock, Orange	-	-
	ATM06-6S-SR01BK	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-6S.)	20	7.5A

Image	Part Number	Description	Size	Amp
	ATM06-6S-SR01BL	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01BN	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01GN	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01GY	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01OR	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01RD	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01WT	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01YL	6 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-6S.)	20	7.5A
	AWM-6S	6 Position, Plug Wedgelock, Orange	-	-

	ATM06-08SA-SR1GY	8 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-8S.)	20	7.5A
	ATM06-08SB-SR1BK	8 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed B, Black Body (Requires Wedgelock AWM-8S.)	20	7.5A
	ATM06-08SC-SR1GN	8 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed C, Green Body (Requires Wedgelock AWM-8S.)	20	7.5A
	ATM06-08SD-SR1BN	8 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed D, Brown Body (Requires Wedgelock AWM-8S.)	20	7.5A
	AWM-8S	8 Position, Plug Wedgelock, Orange	-	-

	ATM06-12SA-SR1GY	12 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-12S.)	20	7.5A
	ATM06-12SB-SR1BK	12 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Black Body (Requires Wedgelock AWM-12S.)	20	7.5A
	ATM06-12SC-SR1GN	12 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Green Body (Requires Wedgelock AWM-12S.)	20	7.5A
	ATM06-12SD-SR1BN	12 Position, Plug, Socket, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Brown Body (Requires Wedgelock AWM-12S.)	20	7.5A
	AWM-12S	12 Position, Plug Wedgelock, Orange	-	-

ATM Series™ SR01 Receptacles and Wedgelocks

Note: Refer to individual datasheets on www.amphenol-sine.com for full specs, faceviews, keying location and product dimensions.

	ATM04-2P-SR01BK	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01BL	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01BN	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01GN	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01GY	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01OR	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01RD	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A

Image	Part Number	Description	Size	Amp
	ATM04-2P-SR01WT	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01YL	2 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	AWM-2P	2 Position, Receptacle Wedgelock, Orange	-	-
	AWM-2PA	2 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AWM-2PB	2 Position, Receptacle Wedgelock, Keyed B, Black	-	-

	ATM04-3P-SR01BK	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01BL	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01BN	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01GN	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01GY	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01OR	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01RD	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01WT	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01YL	3 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-3P.)	20	7.5A
	AWM-3P	3 Position, Receptacle Wedgelock, Orange	-	-
	ATM04-4P-SR01BK	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01BL	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01BN	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01GN	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01GY	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01OR	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01RD	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01WT	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01YL	4 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-4P.)	20	7.5A
	AWM-4P	4 Position, Receptacle Wedgelock, Orange	-	-

Image	Part Number	Description	Size	Amp
	ATM04-6P-SR01BK	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01BL	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01BN	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01GN	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01GY	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01OR	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01RD	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01WT	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01YL	6 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-6P.)	20	7.5A
	AWM-6P	6 Position, Receptacle Wedgelock, Orange	-	-

	ATM04-08PA-SR1GY	8 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-8P.)	20	7.5A
	ATM04-08PB-SR1BK	8 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed B, Black Body (Requires Wedgelock AWM-8P.)	20	7.5A
	ATM04-08PC-SR1GN	8 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed C, Green Body (Requires Wedgelock AWM-8P.)	20	7.5A
	ATM04-08PD-SR1BN	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed D, Brown body (Requires Wedgelock AWM-8P.)	20	7.5A
	AWM-8P	8 Position, Receptacle Wedgelock, Orange	-	-

	ATM04-12PA-SR1GY	12 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-12P.)	20	7.5A
	ATM04-12PB-SR1BK	12 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed B, Black Body (Requires Wedgelock AWM-12P.)	20	7.5A
	ATM04-12PC-SR1GN	12 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed C, Green Body (Requires Wedgelock AWM-12P.)	20	7.5A
	ATM04-12PD-SR1BN	12 Position, Receptacle, Pin, ATM Series™ SR01, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed D, Brown body (Requires Wedgelock AWM-12P.)	20	7.5A
	AWM-12P	12 Position, Receptacle Wedgelock, Orange	-	-

ATM Series™ SR01 Accessories

	ATM13-217-2005-SR	Blank Locking Sealing Plug, Blue, Replaces Size 20 Contacts	20	-
---	-------------------	---	----	---