
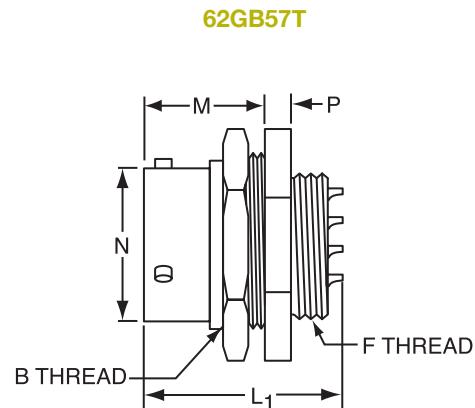
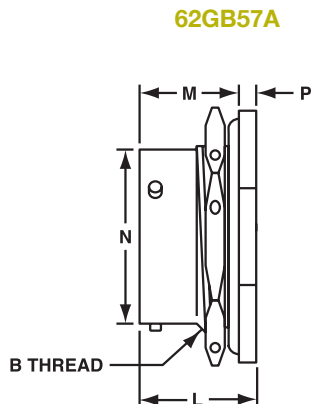


JAM NUT RECEPTACLES

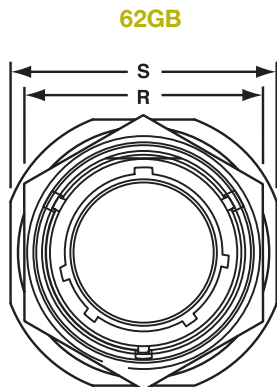

SHELL SIZE	62GB57/62GB17P							
	B THREAD CLASS 2A	M ±.005 (± 0.13)	N	P ±.005 (± 0.13)	R	S	PANEL THICKNESS	
							J MIN.	J MAX.
8	.5625-24 UNEF	0.706 (17.9)	0.473 (12.0)	0.117 (3.0)	0.750 (19.1)	0.942 (23.9)	0.062 (1.6)	0.125 (3.2)
10	.6875-24 UNEF	0.706 (17.9)	0.590 (15.0)	0.117 (3.0)	0.875 (22.2)	1.067 (27.1)	0.062 (1.6)	0.125 (3.2)
12	.8750-20 UNEF	0.706 (17.9)	0.750 (19.1)	0.117 (3.0)	1.062 (27.0)	1.255 (31.9)	0.062 (1.6)	0.125 (3.2)
14	1.0000-20 UNEF	0.706 (17.9)	0.875 (22.2)	0.117 (3.0)	1.187 (30.1)	1.380 (35.1)	0.062 (1.6)	0.125 (3.2)
16	1.1250-18 UNEF	0.706 (17.9)	1.000 (25.4)	0.117 (3.0)	1.312 (33.3)	1.505 (38.2)	0.062 (1.6)	0.125 (3.2)
18	1.2500-18 UNEF	0.706 (17.9)	1.125 (28.6)	0.117 (3.0)	1.437 (36.5)	1.630 (41.4)	0.062 (1.6)	0.125 (3.2)
20	1.3750-18 UNEF	0.894 (22.7)	1.250 (31.8)	0.148 (3.8)	1.562 (39.7)	1.817 (46.2)	0.062 (1.6)	0.250 (6.4)
22	1.5000-18 UNEF	0.894 (22.7)	1.375 (34.9)	0.148 (3.8)	1.687 (42.8)	1.942 (49.3)	0.062 (1.6)	0.250 (6.4)
24	1.6250-18 UNEF	0.927 (23.5)	1.500 (38.1)	0.148 (3.8)	1.812 (46.0)	2.067 (52.5)	0.062 (1.6)	0.250 (6.4)

62GB57A
L MAX.
0.823 (20.9)
0.823 (20.9)
0.823 (20.9)
0.823 (20.9)
0.823 (20.9)
0.823 (20.9)
1.042 (26.5)
1.042 (26.5)
1.075 (27.3)

62GB57T	
L ₁ MAX.	F THREAD CLASS 2A
0.978 (24.8)	.4375-28 UNEF
0.978 (24.8)	.5625-24 UNEF
0.978 (24.8)	.6875-24 UNEF
0.978 (24.8)	.8125-20 UNEF
0.978 (24.8)	.9375-20 UNEF
0.978 (24.8)	1.0625-18 UNEF
1.048 (26.6)	1.1875-18 UNEF
1.048 (26.6)	1.3125-18 UNEF
1.048 (26.6)	1.4375-18 UNEF

All dimensions in inches (millimeters in parenthesis)