


Box Mounting Receptacle

VG 95234– Style A
CA 3102E-B and Modifications

Receptacle for front panel mounting with square flange

Modifications see page 10

Threaded holes in flange not possible

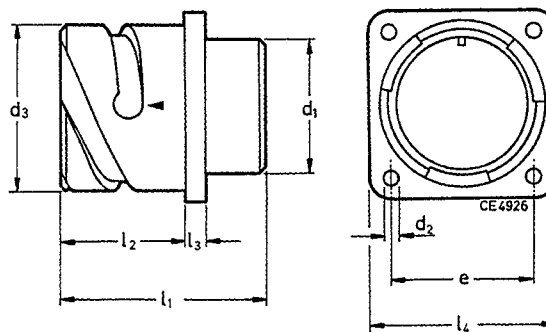

Dimensions are mm

VG95234 Part No.	Cannon Part No.	d ₁ Max.	d ₂ H13	d ₃ -0,15	e ±0,1	l ₁ ±0,3	l ₂ +0,4	l ₃ ±0,2	l ₄ ±0,3	Weight ¹⁾ g max
VG95234A-10SL	CA3102E10SL-**-B	16,20	3,20	18,20	18,20	24,70	14,20	2,80	25,40	12
–	CA3102E12S-**-B	16,20	3,20	21,40	20,60	24,70	14,20	3,20	28,00	15
VG95234A-14S	CA3102E14S-**-B	19,20	3,20	24,60	23,00	24,70	14,20	3,20	30,00	17
VG95234A-16S	CA3102E16S-**-B	22,40	3,20	27,40	24,60	24,70	14,20	3,20	32,50	19
VG95234A-16	CA3102E16-**-B	22,40	3,20	27,40	24,60	33,80	19,00	3,20	32,50	22
VG95234A-18	CA3102E18-**-B	25,60	3,20	30,80	27,00	33,80	19,00	4,00	35,00	28
VG95234A-20	CA3102E20-**-B	29,00	3,20	34,20	29,40	33,80	19,00	4,00	38,00	33
VG95234A-22	CA3102E22-**-B	32,20	3,20	37,40	31,80	33,80	19,00	4,00	41,00	38
VG95234A-24	CA3102E24-**-B	35,30	3,70	40,90	34,90	33,80	20,60	4,00	44,50	46
VG95234A-28	CA3102E28-**-B	41,40	3,70	46,70	39,70	33,80	20,60	4,00	50,80	52
VG95234A-32	CA3102E32-**-B	47,80	4,30	53,40	44,50	33,80	22,20	4,00	57,00	64
VG95234A-36	CA3102E36-**-B	52,60	4,30	59,60	49,20	33,80	22,20	4,00	63,50	80

Dimensions are inches

VG95234 Part No.	Cannon Part No.	d ₁ Max.	d ₂ H13	d ₃ - .006	e ± .004	l ₁ ± .012	l ₂ + .016	l ₃ ± .008	l ₄ ± .012	Weight ¹⁾ g max
VG95234A-10SL	CA3102E10SL-**-B	.638	.126	.717	.717	.972	.560	.110	1.000	12
–	CA3102E12S-**-B	.638	.126	.843	.811	.972	.560	.126	1.102	15
VG95234A-14S	CA3102E14S-**-B	.756	.126	.969	.906	.972	.560	.126	1.181	17
VG95234A-16S	CA3102E16S-**-B	.882	.126	1.080	.967	.972	.560	.126	1.280	19
VG95234A-16	CA3102E16-**-B	.882	.126	1.080	.967	1.331	.748	.126	1.280	22
VG95234A-18	CA3102E18-**-B	1.008	.126	1.213	1.063	1.331	.748	.157	1.378	28
VG95234A-20	CA3102E20-**-B	1.142	.126	1.346	1.157	1.331	.748	.157	1.496	33
VG95234A-22	CA3102E22-**-B	1.268	.126	1.472	1.252	1.331	.748	.157	1.614	38
VG95234A-24	CA3102E24-**-B	1.390	.146	1.610	1.374	1.331	.811	.157	1.752	46
VG95234A-28	CA3102E28-**-B	1.630	.146	1.840	1.563	1.331	.811	.157	2.000	52
VG95234A-32	CA3102E32-**-B	1.882	.170	2.102	1.752	1.331	.874	.157	2.244	64
VG95234A-36	CA3102E36-**-B	2.071	.170	2.346	1.937	1.331	.874	.157	2.500	80

¹⁾ Weight without insulator

CA02L-B designates a receptacle for front panel mounting with solder pin contacts to solder into printed circuits. All pattern drawings upon request. For all other dimensions see above table.

For contact arrangements with #16 and #12 contacts only

