


Straight Plug

VG95234- Style G

CA3106E-B, -02, -03 or -06 designates a straight plug with adapter for heat shrinkable boots

CA3106E-B and Modifications

Modifications see page 10

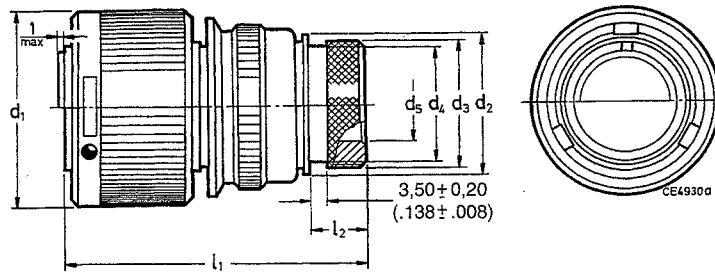

Dimensions in mm

VG95234 Part No.	Cannon Part No.	d ₁ max	d ₂ ±0,2	d ₃ ±0,2	d ₄ max	d ₅ min	l ₁ max	l ₂ ±0,5	Weight ¹⁾ g max
VG95234G-10SL-*	CA3106E10SL-**-***	22,80	17,00	15,50	13,30	7,70	50,00	11,70	24
-	CA3106E12S-**-***	26,00	17,80	15,50	13,30	7,90	50,00	11,70	35
VG95234G-14S-*	CA3106E14S-**-***	29,20	20,10	19,10	17,00	10,60	50,00	11,70	41
VG95234G-16S-*	CA3106E16S-**-***	32,00	23,50	23,90	21,90	13,50	50,00	11,70	51
VG95234G-16-*	CA3106E16-**-***	32,00	23,50	23,90	21,90	13,50	60,00	11,70	58
VG95234G-18-*	CA3106E18-**-***	36,50	26,50	23,90	21,90	14,60	60,00	11,70	65
VG95234G-20-*	CA3106E20-**-***	39,90	30,20	29,60	26,20	18,70	65,00	12,70	75
VG95234G-22-*	CA3106E22-**-***	43,10	33,60	29,60	26,20	20,80	65,00	12,70	80
VG95234G-24-*	CA3106E24-**-***	46,60	38,10	37,80	34,50	24,60	65,00	12,70	95
VG95234G-28-*	CA3106E28-**-***	53,40	41,40	37,80	34,50	27,00	65,00	12,70	120
VG95234G-32-*	CA3106E32-**-***	60,10	48,60	47,80	43,60	33,30	70,00	15,20	165
VG95234G-36-*	CA3106E36-**-***	66,30	54,80	47,80	43,60	38,50	80,00	15,20	180

Dimensions in inches

VG95234 Part No.	Cannon Part No.	d ₁ max	d ₂ ±.008	d ₃ ±.008	d ₄ max	d ₅ min	l ₁ max	l ₂ ±.020	Weight ¹⁾ g max
VG95234G-10SL-*	CA3106E10SL-**-***	.898	.669	.610	.524	.303	1.969	.461	24
-	CA3106E12S-**-***	1.024	.701	.610	.524	.311	1.969	.461	35
VG95234G-14S-*	CA3106E14S-**-***	1.150	.791	.752	.669	.417	1.969	.461	41
VG95234G-16S-*	CA3106E16S-**-***	1.260	.925	.941	.862	.531	1.969	.461	51
VG95234G-16-*	CA3106E16-**-***	1.260	.925	.941	.862	.531	2.362	.461	58
VG95234G-18-*	CA3106E18-**-***	1.437	1.043	.941	.862	.531	2.362	.461	65
VG95234G-20-*	CA3106E20-**-***	1.571	1.189	1.165	1.031	.736	2.559	.500	75
VG95234G-22-*	CA3106E22-**-***	1.697	1.323	1.165	1.031	.819	2.559	.500	80
VG95234G-24-*	CA3106E24-**-***	1.835	1.500	1.488	1.358	.969	2.559	.500	95
VG95234G-28-*	CA3106E28-**-***	2.102	1.630	1.488	1.358	1.063	2.559	.500	120
VG95234G-32-*	CA3106E32-**-***	2.366	1.913	1.882	1.717	1.311	2.756	.598	120
VG95234G-36-*	CA3106E36-**-***	2.610	2.157	1.882	1.717	1.516	3.150	.598	180

¹⁾ Weight without insulator, grommets and contacts.